

POPULAR Computing WEEKLY

1 July 1982 Vol 1 No 11

30p

**Robot Control
on ZX81**


Atom Galaxian

**ZX81
speech pack**

**Basic
re-numbering**

**More Spectrum
Graphics**

**Win a ZX Spectrum
& ZX Printer -
details inside**



Our classifieds are faster.

Do you want to sell your computer and buy a bigger and better one?

Have you ever thought of trying to make some money out of selling tapes of your own programs?

Whatever it is you want to buy or sell why not use our classified pages?

It has to be better than waiting for up to nine weeks to get into one of the old monthly magazines.

Not only that, but our rates are very reasonable.

For private individuals it only costs 20p per word, with a minimum of 10 words.

We can make it so cheap because we charge companies using the classified columns 40p per word.

The classified pages can be used for semi-display advertising.

The cost for this is £10 per single column centimetre, with a minimum charge of £30.

All copy for the classified pages must be pre-paid. (You'll find a handy form on page 22).

Cheques and postal orders should be made out to *Popular Computing Weekly*. Your advertisement should arrive at least two weeks before the publication date.

If you have any queries regarding Classified or semi-display advertising please call
Alastair Macintosh on
01-930 3840

Popular Computing Weekly.
The fast one.

POPULAR Computing WEEKLY

The Team

Editor

Brendon Gore

Reporter

David Kelly [01-930 3271]

Sub-editor

Peter Harvey

Editorial Secretary

Fiona McCormick

Advertisement Manager

David Lake [01-839 2846]

Advertisement Executive

Alastair Macintosh [01-930 3840]

Managing Editor

Duncan Scot

Publishing Director

Nick Hampshire

Popular Computing Weekly,
Hobhouse Court, 19 Whitcomb Street,
London WC2
Telephone: 01-839 6835

Published by Sunshine Publications Ltd.

Typesetting, origination and printing by
Chesham Press, Chesham, Bucks

Distributed by S M Distribution
London SW9. 01-274 8511. Telex: 261643

© Sunshine Publications Ltd 1982

Subscriptions

You can have Popular Computing Weekly sent
to your home; the subscription rate is £19.95 per
year, for addresses in the UK.

How to submit articles

Articles which are submitted for publication
should not be more than 1000 words long.

All submissions should be typed and a double
space should be left between each line.

Programs should, whenever possible, be
computer printed.

At present we cannot guarantee to return
every submitted article, so please keep a copy.

Accuracy

Popular Computing Weekly cannot accept any
responsibility for any errors in programs we
publish, although we will always try our best to
make sure programs work.

This Week



Cover illustration by Ian Craig

News	5
ICL strike hits Beeb.	
Letters	7
Brass envelope on Vic 20.	
Robot Control	8
A 16K game for ZX81.	
Club Reports	11
The Sinclair amateur radio group.	
Reviews	12
Charset-20 and Speech pack.	
Open Forum	15
Seven pages of programs.	
Award scheme	21
Win a ZX Spectrum.	
Programming	22
Basic re-numbering.	
Spectrum	23
More graphics routines.	
Sound & Vision	24
Two tunes to play.	
Peek & poke	25
Your questions answered.	
Competitions	26
Puzzle, crossword.	

Editorial

The phenomenal growth in the number of home microcomputers over the past two years has given rise to a similar growth in the number of different computer languages.

The ZX81, Vic20, Spectrum, BBC micro and TRS80, all have their own versions of Basic — the most commonly used microcomputer language. Unfortunately, most of these variations of Basic are mutually exclusive. A program written for a Vic20 will not run on a ZX81 or a BBC micro.

It is usually possible to convert programs from one version of Basic to another, but it is time consuming and a waste of effort that could better be put to writing original programs.

However, the chances of a standard version of Basic being voluntarily adopted throughout the industry are so remote as to be hardly worthy of consideration. No manufacturer is going to promote another company's products at his own expense.

The solution to this problem lies in the hands of the users. An organised users lobby could put pressure on the manufacturers to agree to a common form of Basic. They will not do it on their own.

Next Week



You're lost in time
with a rogue space frigate
hot on your vapour trail. Have
you got the skill to be a Time Traveller?

Classified

ZX81 WINDOW 16K MAKE THINGS FLY WITH Cassette £4.50

Fantastic 16K version lets you define NET 1, NET 2, but any number of Windows, of ANY size in ANY position on your screen. (Full screen, 1 line, 4 character block; you name it) Graphics in text in each Window can be "sorted" in ANY direction simultaneously or individually against any character background (including reversal). OR you can extend off one edge of your window back on to the opposite side. (Wrap-around effect).

The won't be able to stop yourself thinking of hundreds of possible applications for this HIGH SPEED IN SLOW MODE SCREEN-HANDLING PROGRAM!

NEW GAMES

17 SHAFTESSLEY WY, ROYSTON, HERTS
SG8 5DE

20 SIMPLE ELECTRONIC PROJECTS FOR THE ZX81 and other computers

Make the most of your Micro-computer with this great book of construction projects. £6.45.

Available from:
National ZX Users' Club
44-46 Earls Court Road
London W8 6EJ

Please make your cheque payable to Interface.

ATOM MICROSON HEARING IS BELIEVING

TELESOND 82 combines with most home computers allowing full spectrum sound effects to be heard through an unmodified television set. Incredible but true, the TeleSound 82 uses its MICROSON's ZX81 to get realistic sound effects even with animated graphic games. Connections are made easy by leads fitted with alligator clips. The TeleSound 82 ready built, complete with program for the above computers, costs only £3.95 incl.

CAMPUSOUND
32 Langley Close,
Redditch, Worcs B98 0ET

FANCY A CHAT WITH YOUR ZX81

Then you want TESS, a remarkable 16K program which, via keyboard and screen, talks with you sympathetically. IN ENGLISH, about your problems. An incredible example of artificial intelligence on the 16K ZX81. Only £4.50 from:

AQUARIUS SOFTWARE

53 Townsend Crescent
Pots Road, East Salford
M6 6SD (061 424 1141)

1K ZX81 CHESS

A very sophisticated piece of software controlling the motions of the ZX81 machine. It provides a good game requiring a lot of thought.

Electronics and Computing July 82

£5

Available from:
G. R. Home, C28 Southbridge Way
Crawborough, E. Sussex

M280K FRIEND wanted, have software for exchange, willing to share cost of new software. Write G. Lloyd, Oakmore School, Dursley, South-ampshire.

P-E-P, the Program Enhancement Package for the ZX81 (16K), 7 fantastic new features for your basic programs. Only £5.95 from R & R Software, 34 Bourdon Road, Gloucester.

ZX81. Software, 16K hangman — excellent graphics, £3.95; 1K super-type — includes mastermind £3.95, echo £3.95, penton £3.95, fruit £3.95, sketch £3.95, multiplication race £3.95, roulette £3.95, roll-a-ball £3.95; 16K sketch-draw and save 12 sketches on tape, £3.95; 32K or 16K notepad — save 40 (20 with 16K) pages of data on tape, £3.95; specify memory size when ordering; 16K language dictionary — make your own dictionary, and save it on tape, £3.95; Send sale for further details to T. Meakin, 28 Spinney Rise, Toton, Nottingham NG9 6JN.

ZX81 16K, Full-size typewriter-style keyboard, all in one case. Special keys for games. With 12 tapes, books, cassette player included, £89. Walton-on-Thames TW20 3BQ.

ZX81 ★ BBC ★ ZX82

Educational programs for learning in school and at home

OUR ZX81 SOFTWARE HAS BEEN WELL RECEIVED BY CUSTOMERS AND BY REVIEWERS. WE NOW HAVE PROGRAMS FOR BBC 'A' AND THE SINCLAIR SPECTRUM

Send s.a.s. for details:

AVC SOFTWARE

PO Box 615

BIRMINGHAM B17 9TT

ZX81 16K RAM. Internal sound, software including space games, chess, £80. 01-677 8141 after 6 pm.

VIC-30 CITY BOMBERS, excellent defined colour graphics and sound, continual readout of score and fuel, £3.50 Coppice Hill, Bishops Waltham, Hants.

ATOM, fully expanded, FP ROM, VIA, toolbox ROM, PSU, perfect order, £200. Mr P. Jewsey, Prospect House, Whiting Bay, Isle of Arran, KA27 6PR.

ZX81 SYSTEM plus 16K RAM-Pack Keyboard and software, £100. Evenings 021-430 3777.

ZK PRINTER. Brand new, unwanted gift. Tel: Leeds (0532) 686225 (after 6 pm).

NEW FULLER MICROS ZX81, keyboard, case, fitted motherboard, P.S.U., plus books, software, £35. New DK's onics graphics rom with space invaders cassette, £20. Telephone 0443 203573 evenings.

ZX81 16K (Sinclair), box, leads, etc., 2 months old, £75 incl. Telephone Leicester 762993.

B.B.C. MODEL A, live tv and cassette recorder, £300. Telephone Yateley 87 4726.

FRUIT MACHINE and warp maze for un-expanded ixs, £4.90 (inc. p+p). Telephone Stroud 5506 (evenings).

VIC 26, 6 programs for £3 inclusive, full colour and sound, entertaining and educational, mats, super surround, stringy things, minefield, earth attack, magic square, 2. Mann 47A Portland Street, Lincoln.

DATABASE

The program that everyone needs. Facilities include sort, search, list, delete, change, track, save file, file print if required, etc. etc. Can be used in place of any card index application. £18.95

Access cards accepted. Send cheque or PO or credit card number to:

GEMINI MARKETING LTD
Quay House, Quay Road, Newton Abbot, Devon TQ12 2BL. OR telephone us with your credit card order on Newton Abbot (0626) 60995 De-patch by return.

PERSONAL TUTOR on using the B.B.C. micro. Telephone Pudsey 560587.

ZX81 16K, boxed large keyboard, eight tapes, £100. Telephone Roth (0709) 525913.

ZX81 16K keyboard/case very good condition, £50 worth of books and tapes, £90. 36 Spring Street, Foston Hyndburn, Lancs.

VIC 30, plus "avenger" cartridge, bargain £150 incl. Ingrebourne 48276.

SHARP PC1211 pocket computer with cassette interface, £93. Telephone 041-687 3119 (evenings).

ZX81 16K, free software worth £20, offers around £80. Telephone 02727 37693.

ZX81 1K, complete, as new, £50, no offers. 907-4703 (evenings).

VIC-20, cassette unit, over £20 software and £10 books, worth £270, will accept £220. Tel: 021-454 7082.

VIC users. Add to your software by exchange. Write for list to Mick, 23c Woodstock Road, N4.

BBC GAMES. See for details to ICG8, 139 The Ryde, Hatfield, Herts. AL9 5OP.

ZX81 16K + SOFTWARE. Value over £30, chess, invaders etc, £120 incl. Tel: Maidstone 0622-61917.

BBC MICRO GAMES. Cassette A (Models A & B): Space Invaders (machine code) Codgers Breakout — £5 (inc); Cassette B (Model B only) Pacman (machine code) 3D Maze — £5 (inc). Both cassettes for £9 (inc) from B. Criddle, 8 Sowness Avenue, Fleetwood, Lancs. FY7 8PA.

CLASSIFIED ADVERTISING RATES:

Line by line: For private individuals, 20p per word, minimum 10 words.

For companies, traders, and all commercial bodies, 40p per word, minimum 20 words.

Semi-display: £10 per single column centimetre, minimum length 3 cm. (Please supply A/W as PMT. Or supply rough setting instructions.)

Conditions: All copy for Classified section must be pre-paid. Cheques and postal orders should arrive at least two weeks before the publication date.

If you wish to discuss your ad, please ring Alastair Macintosh 01-930 3840.

Here's my classified ad.

(Please write your copy in capital letters on the lines below.)

Please continue on a separate sheet of paper

I make this words, at per word so I owe you £.....

Name

Address

Telephone

Please cut out and send this form to: Classified Department, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2

ICL strike ends hopes of early Micro B delivery

The gremlins which have so far pushed delivery of the BBC Micro B back to six months, have struck again with a strike at ICL, the main supplier.

The production stoppage at ICL's Kidsgrove plant has brought all deliveries of the B machine to a halt.

Acorn's John Coll admits that ICL's production, at 700 units per week, was already 500 per week below target. Now the company is taking strenuous steps to inspire confidence in its ability to supply the B machine.

Two other manufacturers, apart from ICL, will shortly

begin production of the model B. They are AB Electronic Systems — formerly Clearstone — who begin production immediately, and Race Electronics of Llantrisant, who commence production in the middle of this month.

With three companies producing the B machine, Acorn expects to quickly reduce its six-month backlog. Meanwhile John Coll told PCW: "I'm saddened and frustrated by the whole ICL situation. The position is acutely embarrassing. We thought we would be at the four-week order turnaround stage ages ago."

Although no cheques are now being cashed and no credit-card orders have been drawn, there are still long-standing orders for which cheques have been cashed.

John Coll explained that Acorn will give a refund to customers who replace their cashed-cheque orders with a credit-card order. This offer will not prejudice the purchaser's position in the queue of orders. The credit-card account will then not be drawn until the micro is dispatched.

Deliveries of the model A have been unaffected by production difficulties.

Spectrum get to the customer

Delivery of the first production run Spectrums has now taken place.

The batch forms part of the delivery of machines returned to Times for further work. This followed the discovery of a design flaw, reported in *Popular Computing Weekly*, June 17.

To correct the reported data-bus clash, each of the micros dispatched has been modified by hand.

Pins 36 and 37 of the ULA chip have been cut away from the printed-circuit board and a NAND gate inserted between the ULA and the board. This means that Pins 36 and 37 are inhibited when the input/output request lines from the microprocessor are operating.

This gives priority to the CPU over the ULA when both are trying to use the same data.

The design modification has now been incorporated into the production line at Times and at the time of going to press the second batch had left the factory.



Neat functional lines ... the Amber 2400 printer.

Amber unveils low-cost matrix printer

A new dot matrix printer is to be manufactured by Amber Controls Ltd.

To be priced at just under £70, the Amber 2400 printer is intended for use with BBC, Vic20 or Tangerine micros. A version for the ZX81 will also be produced.

The text print width is 24 characters. The machine was designed for use with ordinary paper to reduce running costs.

The Amber 2400 is of the inked ribbon type. It uses four print solenoids which each cover one-quarter of the paper width. The paper is incremented by one dot-height during the return scan of the print heads.

The printer is supplied with its own built-in operating system and power supply.

Available from the end of August, the Amber 2400 will be priced at £69.95 plus VAT. Five 90ft rolls of paper and one inked ribbon will cost about £2.50.

For further details contact: Amber Controls Ltd, Central Way, Walworth Industrial Estate, Andover, Hants.



Ground Control's 16K I/O board.

Latest I/O port for ZX81

A new combined 16K Ram and I/O board for the ZX81 has been launched by Ground Control.

The board plugs into the expansion connector at the rear of the ZX81.

The I/O interface is memory mapped and uses the 8255 PP10 chip. The I/O has two 14-pin DIL sockets.

The module is available, with power supply, either complete for £53 or in kit-form for £10.75.

Information from Ground Control, Alfreda Avenue, Hullbridge, Essex.

Software debut for the ZX82

Two companies have produced the first software for the Sinclair Spectrum.

AVC Software has produced *Fortune*, a colour/sound version of their *Madam ZX81*.

Bug-Byte Software has launched *Spectral Invaders* — the first *Invaders* game for the Spectrum.

Fortune costs £3 from AVC Software, PO Box 415, Birmingham.

Spectral Invaders costs £5 from Bug-Byte Software, Freeport, Liverpool L3/AB.

Spectrum tapes Microfest '82

In a comparison of home computers in *Popular Computing Weekly*, June 24, we mistakenly stated that the Spectrum cassette system did not work.

The ZX Spectrum loads, saves and verifies programs at 1500 baud. We have had no problems with the system.

Japanese link-up for IBM

IBM is currently negotiating with Japanese firm Matsushita Electric Industrial to develop joint business ties.

One possible venture may

involve the joint development and distribution of a new personal computer.

Matsushita already supplies IBM components.



Whether you are a BBC Microcomputer owner, have limited access or are merely interested, then **LASERBUG** has something to offer you.

LASERBUG is an independent users group dedicated to the support and enhancement of the BBC Microcomputer.

LASERBUG is a central point for ideas and information — we want to hear from you and pass on your ideas and discoveries. Write to us at the address below — but please enclose a SAE if you want a reply.

LASERBUG newsletter is distributed to members each month and is full of news, reviews, letters, articles, programs, contacts and classified rates (on application). Our regular meetings also go a long way to help you get the best out of your BBC Microcomputer.

You want to join? for £12.00 you get a year's subscription to **LASERBUG**, 12 issues of the newsletter and free entry to all **LASERBUG**'s meetings and shows — or send £1 and a large SAE (12" x 9") for a sample copy of the **LASERBUG** newsletter and all the latest information.

Write to:

LASERBUG
4 Station Bridge, Woodgrange Road,
Forest Gate, London E7 0NF.



KEMPSTON (MICRO) ELECTRONICS

only
£26.00
built

Introducing the

ZX81 KLIK-KEYBOARD



This is a full, forty key moving keyboard with real keys that fits in the recess left after peeling off the existing 'touch sensitive' membrane keypad.

It offers the following advantages

- Fits onto the ZX81
- Positive feedback from keys
- No trailing wires
- No special case needed
- Elegant design with two colour legends

This is a most attractive keyboard which will enhance the appearance and improve the performance of your ZX81. Why pay more for an oversized keyboard?

Cheques/Postal orders made payable to:
**KEMPSTON ELECTRONICS, 60 ADAMSON COURT,
HILLGROUNDS ROAD, KEMPSTON,
BEDFORD MK42 8QZ.**

Other ZX81 products include keyboard two-tone Bleeper £8.95 built, keyboard repeat key kit £2.95 + postage on both items.

ZX81 klik-keyboard kit at £22.50, fully built at £26.00. Please add 70p for postage. Delivery 14 days from receipt of order. SAE in all correspondence please. Proprietor A. Pandaal, B.Sc P.G.C.E.

MORE FUN WITH YOUR ZX81!



The addition of our fully-compatible, assembled, tested and guaranteed 16K Ram Pack means more memory for better games and programs

ORDER YOURS TODAY FROM:

Phoenix Marketing Services
Dept. P.C.W., Oaklands House
Solartron Road, Farnborough
Hants GU14 9QL

16K RAM PACK

PUSH-ON PLUG-COMPATIBLE MEMORY

Please send me my Byg Byte 16K Ram Pack. I enclose cheque/ postal order for £25.00 (includes VAT, Postage & Packing)

Name

Address

Dept. E

Allow 28 days for delivery.

Fully

£25.00

inclusive

Letters

Let's put the record straight

Re your Spectrum Review, May 6, I would like to point out that the maximum number of colours you can put on the screen on the BBC Micro, at any one time, is not four but eight. Here is the program:

```
10 C=0
20 MODE 7
30 FOR A=129 TO 136
40 C=C+1
50 VDU A
60 PRINT "COLOUR", C
70 N/A
```

In the now famous ZX Spectrum catalogue, Sinclair have a table. In the table, they say the BBC Micro has no user-definable graphics. Well it has, VDU 23 allows this. Have a look at Neil and Pat Cryer's book *Basic Programming on the BBC Microcomputer*.

Sinclair also say the BBC Micro has no VERIFY command. It has — CAT will not only catalogue, it will also show SAVE errors.

Sinclair do not point out that the BBC Micro has 320x256 hi-res graphics. Nor do they mention that the BBC Micro has 42 different plot commands. The only thing the BBC does not have that the Spectrum does have is "BRIGHT". I am sure that it is better to have a highly expandable system, with the most powerful Basic and the highest-res graphics for under £600, than a ZX Spectrum which can only play one note at a time compared with the BBC's four.

Robert Lober
Rivendell
13 Pwll-y-min Crescent
Cardiff CF5 6LR

A Harrowing view of PCW

Popular Computing Weekly has made a promising start and I hope you can maintain the momentum. It is an unfortunate fact that 90 percent of program listings contain submitted and/or typographical errors in all magazines (at present I am buying eight

monthly magazines and your weekly magazine).

Not having had time to enter and run any of the programs in *Popular Computing Weekly* (issues 1-5), I am not in a position to comment on the percentage of errors contained within them. However, in Issue 4, Barry Cornhill's feature on Chaining ZX81 programs together omits the six mentioned programs altogether. Any chance of printing them in a future issue?

Lastly, please scrap "Citizen Pain" — it is a total non-event content-wise. It would be better to leave that section of the page blank, for competition doodlings etc. The thought of Messrs Ireland and Macdonald being paid for that drivel makes my eyes water.

G O'Brien
105 Roxborough Road
Harrow HA1 1NT

Playing the RAND game

A tip for people with ZX81s and Toni Baker's m/c code book — enter "RAND 640" before running "Life". You will be in for a surprise, to say the least.

Other interesting RANDs are 440, 480 and 510. Any offers for more, as they definitely exist?

Paul F Tolson
16 Thirmer Road
Dewsbury

West Yorkshire WF12 7ED

GOTO this VAL function

In the first issue of *Popular Computing Weekly* (it abbreviates to PCW) Graham Charlton described a method of converting the ON...GOTO facility for use in ZX81 programs using the AND logical connective.

The method I use may be of interest to readers. It has the advantage that it does not involve re-numbering, as GOTO [00] may, and it also looks more like the conventional ON...GOTO. Simply use the VAL function along with the string slicing properties of ZX

basic. For example, to translate:

ON J GOTO 1200,2420,1000,25

for the ZX, write:

GOTO VAL "1200;2420;1000;25"
(A+J-3 TO 4+J)

Clearly, if the line numbers were more than three characters long then the term in brackets could be written (3+J-2 TO 3+J).

Alexander Macphie
26 Glenburn Gardens
Whitburn
West Lothian EH47 8NL

Manpower helps the ZX printer

Roger Bexley may find that the answer to his problem of faint printing on the ZX81 (Peek & Poke, April 23) is to pull the paper gently as it feeds through. The ZX81 printer is like a car with a flat battery — so much current is taken by the motor that there is nothing left for the spark. Easing the load on the motor in this way may give a darker print.

Tim Goldingham
11 Furze Platt Road
Maidenhead SL6 7ND

Please look Sharp about it!

Congratulations on an excellent magazine. I have found only one snag with it — I have recently outgrown my ZX81 and expanded to a Sharp MZ80K. Please, please, please could you cater for the MZ80K as well as the ZX81, Vic and BBC Micro. I am looking forward to the next issue of *Popular Computing Weekly* and hope you feature the MZ80K.

Nigel Nock
Cwmifort House
Bowls Lane
Caerphilly
Glamorgan

South Wales CF8 2TW

Catering for the top brass...

In reply to your Sound and Vision article in your May 27 issue, please find enclosed a subroutine for producing a brass envelope on a Vic-20.

This should work on any music producing micro. You would only need to alter the volume address "V" (36878 on the Vic) and the limits of this (0 to 15) on the Vic). You may also like to amend the quantities in the delay (FOR-NEXT) loops to take into account the different counting speeds of micros.

Once you have set up a series of pitch pokes to make your tune in the normal fashion — you only need to enter GOSUB 1000 after each poke.

The volume starts and drops back to one. This is to eliminate the annoying click which is heard when the volume "V" is poked on and off. The volume should be poked off at the end of the tune to avoid a constant drone in the rest of the program.

Of course, this is not a true brass synthesis, as there is neither sawtooth wave nor envelope filter, but it gives more realism than the drainpipe on/off sound, with which micros seem to be lumbered.

Although I would not play my Vic during a live performance, I do use it to produce a repeating melody and a display on a monitor, prior to our band's venture on stage at gigs.

```
1 V=36878
1000 REM BRASS ENVELOPE
1002 REM (A)CSR
1004 FOR A=1 TO 15
1006 POKE V,A
1008 FOR T=1 TO 2
1010 NEXT T,A
1100 REM (A)CSR
1102 FOR C=15 TO 4 STEP -1
1104 POKE V,C
1106 NEXT C
1200 REM (A)CSR
1202 FOR S=1 TO 30
1204 NEXT S
1300 REM (A)CSR
1302 FOR R=4 TO 1 STEP -1
1304 POKE V,R
1306 FOR T=1 TO 4
1308 NEXT T,R
1310 RETURN
```

D Whittaker
204 Poplar Court
Salford 6

If you have an opinion you want to express, or have spotted an error that needs correcting, write to: Letters, *Popular Computing Weekly*, Hobbhouse Court, 19 Whitcomb Street, London WC2.

Robot Control

You are living in a world dominated by robots. All the work is done by robots, while humans follow a hedonistic lifestyle devoted to idle pleasure.

In a society similar to ancient Rome, life has lost its meaning and its value. Pleasure has become the ultimate goal and bloodlust the ultimate pleasure.

To satisfy this growing desire for blood, a world-wide lottery has been instituted. Everybody's name is fed into the central computer. You are one of the unlucky few who has been chosen to compete in The Games.

A miniature radio transmitter has been surgically implanted in your body and you have been released in an arena. A robot, attuned to the transmitter in your body, is pursuing you relentlessly. The only way you can escape is by forcing the robot to step onto a mine. If you position yourself so the mine lies in the robot's path, it will step onto it and be destroyed.

But, your respite will be brief. If you succeed in evading the first robot, two more will be released in the arena. If you manage to avoid these two robots, three more will take their place, and so on.

Machine code

This program runs on a 16K ZX81 and makes judicious use of machine code. But, the program must be entered exactly as shown in the listing to ensure that the correct addresses are used. Particular attention should be paid to lines 100-137, as they contain the hex code for the machine code. Line 1 should consist of exactly 450 dots.


After entering the program, you should save it onto tape immediately. This will


save you from typing in the entire program again if the computer should crash.

When the program is run, the screen will go blank for a few seconds while the machine code is poked into line 1. If you have made any mistakes in entering the hex code, the following message will appear on the screen: "PARITY ERROR AT LINE N". You should then correct any mistakes on that line before attempting to run the program again.

If you have entered the program correctly, the arena will appear on the screen. You will be represented by an H in the top left-hand corner. A robot will appear in the form of an inverse quotation mark and a mine will appear as a grey square.

To move the H around the screen, use the keys in a square around the S key:

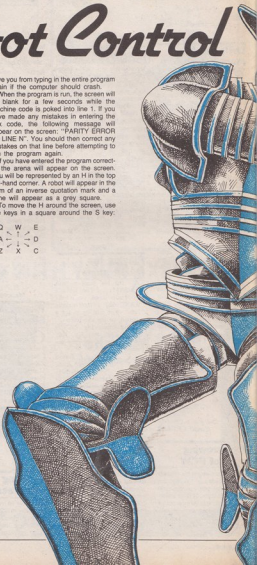

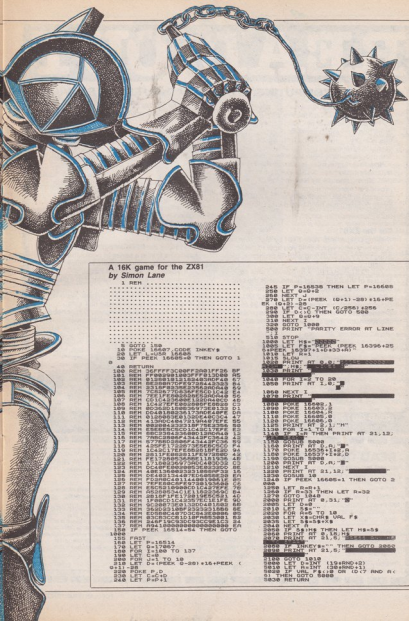

A 16K game for the ZX81 by Simon Lane

```

1 REM
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

```

READ-OUT

READ-OUT FOR
SOFTWARE
& BOOKS

POPULAR COMPUTING WEEKLY/READ-OUT BOOK SERVICE

For the BBC Micro:

If you own a BBC Micro, the *Practical Programs for the BBC Computer* by David Johnson-Davies, is the book for you! It contains over twenty practical programs ranging from maths and graphics to language manipulation and games. The programs have been tested and they work!

Now that Auntie Beeb is actually delivering its micros to customers, *BASIC Programming on the BBC Microcomputer* by Neil and Pat Cryer will provide an excellent introduction on how to program in BASIC specifically for the BBC Micro. Every program has been tested on a production model.

For the ZX81:

Byteing Deeper into Your ZX81 by Mark Harrison is the bestseller which tells you how to get to grips with your ZX81 and with 39 programs to match!

The *ZX81 Pocket Book* by Trevor Toms covers the use of the ZX81 in detail and leads the reader into a clear understanding of programming.

20 Simple Electronic Projects for the ZX81 by Stephen Adams can really put your ZX81 to practical use in a number of electronic projects — thermometer, burglar alarm, voltmeter etc.

34 Amazing Games for the ZX81 by Alistair Gourlay, shows you what you can do with only 1K of memory.

For the PET:

An excellent introduction for beginners and an invaluable aid for enthusiasts is *The Personal Computer Book 2nd Edition* by Robin Bradbeer which tells you all you need to know about microcomputers.

"... sets out in a very entertaining and readable form the facts on owning a computer ..."

Computing Today

"Robin Bradbeer's book provides all the information in one place, in a sensible order and in a consistent, clear style." *Practical Computing*

For the Beginner:

Learning to Use the PET Computer by Garry Marshall is the first in a series of books that introduces popular micros (others to follow are ZX81, ZX Spectrum, VIC-20 and BBC Microcomputer). It eases the reader into a clear understanding of his computer.

Programming the PET/CBM by Raeto West is quite simply the best book on the PET ever published. It contains everything you'll ever need to know about the PET and its workings.



READ-OUT PUBLISHING COMPANY LTD

8 Camp Road, Farnborough, Hampshire, GU24 6EW Telephone: 0252 510331/2 Telex 858001 GOWER G

READ-OUT PUBLISHING COMPANY LTD

8 CAMP ROAD, FARNBOROUGH, HAMPSHIRE GU24 6EW.
24 hour answering service. Telephone: 0252 510331/2

Name

Address

Make cheques payable to Read-Out Publishing Company Ltd.

I enclose my cheque for £

Please debit my Access ☐

Signed

Number

Date

Please send me copies of:
All prices include postage.

- ☐ *Practical Programs for the BBC Micro* @ £7.50
- ☐ *BASIC Programming on the BBC Microcomputer* @ £8.95
- ☐ *Byteing Deeper into Your ZX81* @ £6.45
- ☐ *The ZX81 Pocket Book* @ £6.95
- ☐ *20 Simple Electronic Projects for the ZX81* @ £7.45
- ☐ *34 Amazing Games for the ZX81* @ £5.95
- ☐ *Learning to use the Pet Computer* @ £5.45
- ☐ *Programming the PET/CBM* @ £14.95
- ☐ *The Personal Computer Book* @ £7.55

PCB-3

Club Reports

Why ham and chips means new wave radio

David Kelly talks to Paul Newman, founder of the Sinclair Amateur Radio User Group.

Paul Newman's house in Gaisdon is distinguished from its neighbours by the 24 foot, 16-element, antenna which extends upwards into the sky from his chimney.

During the day he is a computer programmer for a software house, but by night he is to be found at his "old pump handle".

He is an amateur radio ham, call-sign G4INP.

In 1981 he formed SARUG, the Sinclair Amateur Radio User Group, which now has upwards of 175 members.

How did he become involved with amateur radio in the first place? Paul explains: "I was about 10 years old. Wandering round the estate where I lived, I saw this guy with funny bits of wire in his garden. I asked him what they were — he explained — and I've been fascinated ever since."

With the advent of the ZX80 he became seriously interested in the possible applications of microcomputers for amateur radio users.

The most obvious such use of a micro is for the encoding and decoding of radio messages. Nearly all amateur radio enthusiasts use either Morse code or radio teletype for transmission. Very little speech is sent or received, mainly because amateur radio messages are sent all over the world. Where a voice would be unintelligible, a sequence of short and long sound pulses can still be distinguished.

Both Morse and radio teletype lend themselves to automated microcomputer control.

Paul first contacted a like-minded radio user on-air — Steve Gibbs, who broadcasts from Guernsey. They corresponded for some time and then placed an advertisement, asking to hear from other radio/micro users, in the American magazine, 73. Seventy Three is ham radio slang for 'greetings'.

As a result of the advertisement, Paul heard from Marty Irons, who runs the American Sinclair Amateur Radio User Group (ASARUG). Paul joined ASARUG, becoming the first British member. But he also began to think of forming a similar UK group.



Computer radio ham . . . Paul Newman.

Early in 1981 he wrote to Radio Communication asking for interested micro users to contact him. "I thought we could exchange ideas, programs and generally keep each other in touch," he says. "I thought I might get about 20 to 30 replies."

"Had I known what I know now I might have thought twice about doing it."

In the following two weeks Paul received over 200 replies. The response caused him unexpected problems: "It soon became obvious that I could not organise a UK group like ASARUG. Over there it is informal — they keep in touch on-air. That would not be possible with 200 members."

So the first issue of a regular news letter was written. Called SARUG News the 10 photocopied sheets were produced and funded by Paul himself. The newsletter contained several programs,

news and views from the US and information on the use of the ZX80 in amateur radio.

In the following months the membership settled down to an enthusiastic group of about 80. In November 1981, with the ZX81 widely available, Paul formed the present group — SARUG UK. He charged a £5 subscription fee to cover printing costs.

Issue 5 of the newsletter has now been sent out. SARUG UK currently has about 180 members in 14 countries.

Interface chip

With a one-chip interface, I/O port and a small 350 byte machine-code program, a ZX81 can be connected to a radio. A simple algorithm allows the words to be keyed in and converted into Morse. Similarly, Morse can be decoded into English.

One problem with the use of the ZX81 is that its clock timer has a harmonic that is within the amateur bands. For this reason the ZX81 has to be shielded from the transceiver.

A microcomputer is, however, not only of use in sending or receiving radio signals. It can also be used to assist in circuit or antenna design, satellite tracking, logging of contacts and continuous receiver monitoring.

SARUG UK broadcast ZX programs in the 450 to 28 MHz band range. In the next few weeks a transatlantic ZX program exchange network will be set up with ASARUG.

One of SARUG UK's members is working on a real-time satellite telemetry and tracking system.

Paul's own interest is in the link between radio conditions and the weather. Little is known about the way radio waves travel through the air, but freak atmospheric conditions do result in reception anomalies.

Paul described an incident when he picked up a radio station in Norway while trying to contact Holland. Such effects are caused by atmospheric "ducting". Layers of air of different densities can act as a tunnel, called a wave-guide, down which the radio signal is channelled.

He reckons that such conditions are predictable and would like to set up a continuous monitoring station to record radio conditions, weather and wind-speed.

Membership of SARUG UK is open to all amateur radio licence holders or anyone with a proven interest in amateur radio.

For further information contact: Paul Newman (G4INP), 3 Red House Lane, Leiston, Suffolk.

We want to hear from you!

Whether you are starting a new club, holding a special meeting, or just changing the venue, we want to hear from you.

Write to David Kelly, Club News, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF or call him on 01-930 3271.

Reviews software

Banking system

J. P. Gibbons, 14 Avon Road, Ovington, Kent.

ZX81, 16K

Price £9.00

The ZX81 is now supported by a comprehensive catalogue of software. The vast majority of this software comprises games of one kind or another but as the ZX81 matures, an area that is being increasingly developed is the business/personal finance program.

I first saw J. P. Gibbons' Personal Banking System (PBS) at the 1981 ZX Microfair, and thought it rather over-priced at the time, at £10. A year and several refinements later, together with a drop in price, makes it look a lot more attractive.

And this program is attractive. It comes with a detailed handbook, and an amusing demonstration program, on one side of the tape. This demonstration explains how the System works, and also how Sinclair made his fortune!

The System takes a little time to set up, and careful reading of the excellent manual is necessary whilst doing so. Once this is done the program runs well.

The account name, together with the current year, date and balance brought forward, is typed in, and then details of your standing orders. The standing order file will recognise between 10 and 24 monthly, quarterly, annual and semi-annual payments. In the accompanying (highly fictional) illustration, I am paying Sinclair £100.00 every six months. Popular Computing Weekly are receiving my £19.95 annual subscription on the 8th August. Standing order No 3 is a very mysterious payment of £250 every month from one F. Fawcett. The rest is self-explanatory, and pure fantasy.

Now the data from your cheque-book can be added to the System. Cheque number, date of cheque, details (payee etc) and amount are all inputted, and the PBS will then check through the standing orders, posting any that are due on that date. The program then prints the information, together with the up-dated balance, for each input. Ten pages of 12 lines each can be held in the PBS. As you can see from the next illustration, the standing orders have been accounted for automatically.

Corrections of past data, or additions to the file, are easily made at any time. The program will, however, make certain that the user is sure of the correction before it proceeds with execution.

One more facility is offered by the Menu - Entry Search. Using this, one can find a certain payment, described by cheque number, payee, or amount and display the

item. The program will find all occurrences of that description, so that one can, for example, find out how much has been paid to the local supermarket over the year (if you are sure you wish to know!).

As with any program of this nature, a printer is almost a necessity, and all the pages of the account, with either cheque numbers or payee details displayed, can be printed. The standing order file, and the Entry Searches, can also be printed.

Back-up maintenance is provided for the PBS. This is, unfortunately, a rarity for the ZX81, and other manufacturers should follow Gibbons' example in this. He will supply the purchaser with up-dates as they are implemented. Future developments will include a financial analysis routine, and a 32K version giving a statistical break-down using histograms.

An interesting detail of the present program is a small machine-code routine for high-speed saving and loading of data, the whole process taking only some 45 seconds. The loading procedure overwrites any data presently held by the PBS, so multiple accounts can easily be handled, without the need for lengthy re-loading of the master program.

Summary

The unique fast-load feature, the after-sales support, and the flexibility and user-friendliness of this program make it a joy to use. Of greatest use in conjunction with a printer, J. P. Gibbons' Personal Banking System is a very successful program, and can be recommended. **TB**

.. STANDING ORDERS ..

NO	DETAILS	DUE DATE	AMOUNT
1	SINCLAIR	08 JUL 181	-100.00
2	PC WEEKLY	08 JUL 101	-19.95
3	POPCOM	08 JUL 101	-19.95
4	INSURANCE	08 JUL 101	-250.00
5	NEW CAR	08 JUL 101	-100.00
6	SALARY	08 JUL 101	250.00

N/L TO CONTINUE: "P" TO PRINT
.. BANK ACCOUNT 1982 PAGE 1 ..

DATE	DETAILS	CR	DR	BALANCE
01-JUL	BY FUG	2000.00		2000.00
08-JUL	ADT. RAIL	8.79		1991.21
08-JUL	SALARY	2400.00		4391.21
08-JUL	PC WEEKLY		19.95	4371.26
08-JUL	P. FAWCETT		250.00	4121.26
08-JUL	SPECTRUM		19.95	4101.31
08-JUL	HORTON		100.00	4001.31
08-JUL	INSURANCE		250.00	3751.31
08-JUL	RATES		100.00	3651.31
08-JUL	NEW CAR		100.00	3551.31
08-JUL	ADT. RAIL		8.79	3542.52
08-JUL	OFF LICENCE		237.80	3304.72

Charset-20

Rabbit Software, 380 Station Road, Harrow, Middlesex.

Vic-20, 3K

Price \$4.99

Vic owners must be relieved that some cassette software is, at last, coming on to the market at reasonable prices. We have had many calls complaining about the cost of some of the Commodore cartridges.

Charset-20 allows you to design your own characters for the Vic and is one of the more serious packages put out by Rabbit Software, a division of Cream Computers. At £4.99 the price is competitive, even in comparison with Sinclair software.

The documentation for Charset-20 is non-existent. The enclosed small dot-matrix printer strip of paper simply says Charset-20. As seems to be usual with Vic-20 programs the instructions are loaded first, before the main program. At this point you learn that you need the 3K Ram pack to use the program.

There are seven screen-worths of instructions with the program. Reading through and trying to memorise the whole lot first time through is well-nigh impossible.

For the uninitiated and new Vic owners the instructions will mean very little. For example, the opening words in the instructions are "When the program is run it will display several POKES which initialise various pointers in the Vic chip. Commands are also given to copy the character set which normally is at 32768 into Ram." Cast your mind back a few months and ask how much these instructions would have meant.

The technique used to design your own characters is quite simple. You select a character you will not need to use. Using the program the Vic will display the character as an 8 by 8 dot matrix. Each dot in the matrix can then be edited using the BLK and WHT keys to set and reset the points. You use the cursor keys to move from point to point.

We gather from Rabbit that there have been some complaints from users about the lack of instructions and the need to keep referring back to the instructions program. The company says that an instruction leaflet is now included with each cassette.

Summary

This is a relatively simple but useful program for the Vic-20. If you are interested in learning more about how you Vic works we would recommend it. The price of £4.99 is at the sort of level we would like to see all Vic programs. **DR**

Reviews

hardware

TE i/o port

Thumall Electronics, 95 Liverpool Road, Cadishead, Manchester.
Price £17.95 assembled and £14.95 as a kit without case.

This is not a memory-mapped port, like many others, so you cannot use PEEK and POKE to get information out of it. Instead Thumall have provided a ROM statement containing a machine-code routine which does the same job.

The port is based on a Z80A Programmable Input/Output device (PIO) addressed by having the address line A7 low (ie any number below 128 will give access to the port). The configuration of the port needs to be set before use.


It contains 16 lines which can form two 8-bit ports or one 16-bit port for input or output. In fact, each bit of the 16 available lines can be individually assigned as either an input or an output. Once this is done the user can make use of two other connections from the port, the strobe and ready lines. These alert an external device that data is ready for it and waits for a reply before clearing the port for a new input or output. This is often called "handshaking". Being an input/output port the full amount of RAM can be used, but care must be taken with addressing as the Sinclair's poor addressing also occurs on the input/output map.

The instructions have been simplified and should be easy enough to use by a Basic programmer or a machine-code user. The port has dimensions of 4 x 3 x 5 1/2 inches and plugs on to the edge of the ZX81, with an edge connector at the back for RAM, printer etc. There are many other boxes which can connect to this port containing relays, LEDs and joysticks made by the same company. The PIO is easy to use and the ports appear on a pcb edge on the right-hand side so no soldering is necessary. **SA**

S-pack

DCP Microdevelopments, 2 Station Close, Lingwood, Norwich.
Price £49.95; extra ROMs £14.95.

This unit connects to the back of a ZX81 to provide it with a computer generated speech facility. The black box contains a special processor and a ROM containing the words to be spoken. It also contains three other sockets so that other word ROMs can be plugged in. The unit does not obstruct any other extension of the ZX81 as there is a printed circuit-board edge on the back of the box so that a RAM pack, printer etc. can still be plugged in. The S-Pack is driven from the ZX81's own



The 16-line input/output port now available from Thumall Electronics.

power supply and requires no external amplifier since a volume control and loudspeaker are built-in. If, however, you want to connect it up to an external amplifier a 3.5mm jack-plug socket has been provided (it is the same size as the tape leads, so the words can even be recorded on tape).

The S-Pack is memory-mapped into two locations in RAM (49149 and 49148) and is simply POKEd with the number of the word required. A pause of some sort must be included before the next word is spoken in order that the processor has time to put out the word. The word may be any one of the 72 included in the first ROM (which is provided with the S-Pack) or if all the available ROMs are fitted the total vocabulary is 249 words. Most of these words are measurements such as a complete set of numbers in the first ROM from zero to a million.

The first ROM also contains the whole alphabet. This includes Zee for Z as this is an American-produced ROM! One can, however, make some words out of the other words, by shortening the words spoken. This can be done as the processor stops talking as soon as another word is POKEd in. Only the beginning of the words can be used in this way though.

Summary

The DCP pack has a clear, but definitely transatlantic voice of sufficient volume for the single user. It is very easy to use and there is much entertainment in trying to find how many other words you can make yourself. The price is well below anything yet available. **SA**

The Electronic office

By Dennis Jarrett.
Gower/Philips, 165 pages.
Price £12.50.

To move into the age of the electronic office is costly — those intelligent copiers, teletext transceivers, satellite communications systems and so on do not come cheap. But come they will, and indeed they are here.

This book also is not cheap but it is a readable, well-illustrated account of the field, written by a specialist journalist.

Many users of personal computers are becoming involved with computerised accounting, data-base systems, Prestel, and even word-processing. These applications form the beginnings of a personal electronic office — an exciting concept requiring substantial investment and changes of attitude.

If your family is lukewarm about the time you spend poking around a keyboard, you might consider it worthwhile to arm yourself with this book. It presents a fascinating new world.

Jarrett is right to insist that we must move fairly slowly to the new world of automated office activity. Whether vested interests will allow us to do that is another matter. Certainly, these advances will affect us all.

Summary

This is one of the best "person-in-the-street" accounts of progress, problems and potential in the field of office automation. If that interests you, then read it. **KJ**

ABERSOFT

7 MAESAFALLEN, BOW ST, DYFED, SY24 5BA

ZX81 & Spectrum Games

Now NEW LOW prices!!!!

PROGRAM	OLD	NEW 81	SPECTRUM
Chess 1.4 10 levels m/c	10.00	8.95	
Adventure 140 locations based on the original (At £10.00 well worth the money Sinclair User Issue 2 review)	10.00	8.95	9.95*
Invaders Fast m/c arcade action	5.00	4.45	
Mazeman All the features of the original arcade version m/c	5.00	4.45	4.95

*requires 48k Spectrum

All prices are inclusive
Return of post service

ZX81 KEYBOARD £25.95 (fully built)

A NEW 45-KEY KEYBOARD FOR THE ZX81

- ★ 45 Keys, including single keys for RUBOUT, EDIT and FUNCTION.
- ★ 2 Shift keys (left and right).
- ★ Full repeat on all keys, including single-function keys.
- ★ Large space key, and in the proper place!
- ★ Typewriter switches, with full movement — not touch sensitive type.
- ★ All symbols, graphics etc shown in two colours.
- ★ Simply plugs into the ZX81 (RAM etc operation not impaired). Will fit a ZX80 but requires 13 solder joints.

Kit version available £22.95.

Send stamped addressed envelope for illustrated catalogue and data sheet for keyboard.

HARRIS & LOCKYER ASSOCIATES

DEPT PCW, 33 PEDMORE CLOSE
WOODROW SOUTH, REDDITCH

WORCS.

Tel: (0527) 24452

Prices include VAT and postage. Overseas add £1.80

Cash with order or now COD. Phone orders welcome.



From Dreams to Reality.....

Now Available



B.B.C. Microcomputer Games Pack 1

GAMES PACK INCLUDES:
STARWARS - BLACKJACK - ALIEN
INVASION - SIMON FORTUNE.

B.B.C. Microcomputer Pack 2

Star Trek - Puck Chase -
Mastermind

Both packs
work in 16k



New from Epsilon Software

Beebtrek

A real time space adventure, with sound effects & colour graphics works in 16k

£7.95

Cassette Recorders

With remote control, suitable for use with BBC Micro Supplied with lead

£28.50

RGB Colour Monitor

As used in The Computer Programme incl. lead

£315.00

for further information send large S.A.E.

ADD £3.00 POST & PACKING
ALL PRICES INCLUDE VAT

Computers for All

72 NORTH STREET, ROMFORD, ESSEX. TEL 0708 752862



Open Forum

Open Forum is for you to publish your programs and ideas.

It is important that your programs are bug free before you send them in. We cannot test all of them.

Contributions should be sent to: Popular Computing Weekly, Hobhouse Court,
19 Whitcomb Street, London WC2H 7HF.

How to contribute

Each week the editor goes through all the programs that you send to Open Forum in order to find the Program of the Week.

The author of that program will qualify for DOUBLE the usual fee we pay for published programs.
(The usual fee is £10.)

Presentation hints

Programs which are most likely to be considered for the Program of the Week will be computer printed and accompanied by a cassette.

The program will be well documented, the documentation being typed with a double spacing between each line.

The documentation should start with a general description of the program and then give some detail of how the program has been constructed and of its special features.

Listings taken from a ZX Printer should be cut into convenient lengths and carefully stuck down on to white paper, avoiding any creasing.

Please enclose a stamped, self-addressed envelope.

Character plot

on Vic-20

To design your own characters for the Vic-20, it is usually necessary to draw them on an 8 x 8 grid, and then convert each line of the grid into a decimal value as in Figure 1.

The resulting values are then placed in data lines to be read by the program and poked into Ram memory locations to form the new character generator. This can be a tedious task, especially if there are many characters to be defined.

Program A allows you to design your characters on the screen, and on completion saves them on to tape ready for inclusion into any program.

Program notes

30-40 Checks where Basic program starts. Peek (44)=10 with at least 8K memory expansion.

to next page

		128	64	32	16	8	4	2	1		
1										$0 \times 0 + 32 \times 16 + 64 \times 0 + 0$	= 512
2										$0 \times 0 + 0 + 16 \times 64 + 0 \times 0$	= 1024
3										$0 \times 64 + 32 \times 16 + 64 \times 0 + 0$	= 1792
4										$0 \times 64 + 0 + 16 \times 0 + 0 \times 0$	= 0
5										$128 \times 64 + 32 \times 16 + 64 \times 0 + 1$	= 8321
6										$0 \times 64 + 32 \times 0 + 0 \times 64 + 0$	= 0
7										$128 \times 64 + 32 \times 16 + 64 \times 0 + 1$	= 8321
8										$128 \times 0 + 0 \times 32 + 0 \times 0 \times 1$	= 0

```

10 PRINT "Q"
20 IFEEK(44)=10 THEN G=4169-ZS=32768:GOTO30
40 G=7763-ZS=32768
50 PRINT "ENTER NUMBER OF CHARACTERS TO BE DRAWN" INPUT N
60 IF N<1 THEN GOTO30
100 DRAWN=71:PRINT "POKE8879,53"
120 FOR M=1 TO N
140 S=0
160 FOR I=0 TO 7:FOR J=0 TO 7
180 POKE I*32+J, S:POKE I*32+J, S
190 NEXT J:GOTO 210
210 S=S+1:GOTO 160
220 S=0:GOTO 160
230 S=0:GOTO 160
240 S=0:GOTO 160
250 S=0:GOTO 160
260 S=0:GOTO 160
270 S=0:GOTO 160
280 S=0:GOTO 160
290 S=0:GOTO 160
300 S=0:GOTO 160
310 S=0:GOTO 160
320 S=0:GOTO 160
330 S=0:GOTO 160
340 S=0:GOTO 160
350 S=0:GOTO 160
360 S=0:GOTO 160
370 S=0:GOTO 160
380 S=0:GOTO 160
390 S=0:GOTO 160
400 S=0:GOTO 160
410 S=0:GOTO 160
420 S=0:GOTO 160
430 S=0:GOTO 160
440 S=0:GOTO 160
450 S=0:GOTO 160
460 S=0:GOTO 160
470 S=0:GOTO 160
480 S=0:GOTO 160
490 S=0:GOTO 160
500 S=0:GOTO 160
510 S=0:GOTO 160
520 S=0:GOTO 160
530 S=0:GOTO 160
540 S=0:GOTO 160
550 S=0:GOTO 160
560 S=0:GOTO 160
570 S=0:GOTO 160
580 S=0:GOTO 160
590 S=0:GOTO 160
600 S=0:GOTO 160
610 S=0:GOTO 160
620 S=0:GOTO 160
630 S=0:GOTO 160
640 S=0:GOTO 160
650 S=0:GOTO 160
660 S=0:GOTO 160
670 S=0:GOTO 160
680 S=0:GOTO 160
690 S=0:GOTO 160
700 S=0:GOTO 160
710 S=0:GOTO 160
720 S=0:GOTO 160
730 S=0:GOTO 160
740 S=0:GOTO 160
750 S=0:GOTO 160
760 S=0:GOTO 160
770 S=0:GOTO 160
780 S=0:GOTO 160
790 S=0:GOTO 160
800 S=0:GOTO 160
810 S=0:GOTO 160
820 S=0:GOTO 160
830 S=0:GOTO 160
840 S=0:GOTO 160
850 S=0:GOTO 160
860 S=0:GOTO 160
870 S=0:GOTO 160
880 S=0:GOTO 160
890 S=0:GOTO 160
900 S=0:GOTO 160
910 S=0:GOTO 160
920 S=0:GOTO 160
930 S=0:GOTO 160
940 S=0:GOTO 160
950 S=0:GOTO 160
960 S=0:GOTO 160
970 S=0:GOTO 160
980 S=0:GOTO 160
990 S=0:GOTO 160
1000 S=0:GOTO 160
1010 S=0:GOTO 160
1020 S=0:GOTO 160
1030 S=0:GOTO 160
1040 S=0:GOTO 160
1050 S=0:GOTO 160
1060 S=0:GOTO 160
1070 S=0:GOTO 160
1080 S=0:GOTO 160
1090 S=0:GOTO 160
1100 S=0:GOTO 160
1110 S=0:GOTO 160
1120 S=0:GOTO 160
1130 S=0:GOTO 160
1140 S=0:GOTO 160
1150 S=0:GOTO 160
1160 S=0:GOTO 160
1170 S=0:GOTO 160
1180 S=0:GOTO 160
1190 S=0:GOTO 160
1200 S=0:GOTO 160
1210 S=0:GOTO 160
1220 S=0:GOTO 160
1230 S=0:GOTO 160
1240 S=0:GOTO 160
1250 S=0:GOTO 160
1260 S=0:GOTO 160
1270 S=0:GOTO 160
1280 S=0:GOTO 160
1290 S=0:GOTO 160
1300 S=0:GOTO 160
1310 S=0:GOTO 160
1320 S=0:GOTO 160
1330 S=0:GOTO 160
1340 S=0:GOTO 160
1350 S=0:GOTO 160
1360 S=0:GOTO 160
1370 S=0:GOTO 160
1380 S=0:GOTO 160
1390 S=0:GOTO 160
1400 S=0:GOTO 160
1410 S=0:GOTO 160
1420 S=0:GOTO 160
1430 S=0:GOTO 160
1440 S=0:GOTO 160
1450 S=0:GOTO 160
1460 S=0:GOTO 160
1470 S=0:GOTO 160
1480 S=0:GOTO 160
1490 S=0:GOTO 160
1500 S=0:GOTO 160
1510 S=0:GOTO 160
1520 S=0:GOTO 160
1530 S=0:GOTO 160
1540 S=0:GOTO 160
1550 S=0:GOTO 160
1560 S=0:GOTO 160
1570 S=0:GOTO 160
1580 S=0:GOTO 160
1590 S=0:GOTO 160
1600 S=0:GOTO 160
1610 S=0:GOTO 160
1620 S=0:GOTO 160
1630 S=0:GOTO 160
1640 S=0:GOTO 160
1650 S=0:GOTO 160
1660 S=0:GOTO 160
1670 S=0:GOTO 160
1680 S=0:GOTO 160
1690 S=0:GOTO 160
1700 S=0:GOTO 160
1710 S=0:GOTO 160
1720 S=0:GOTO 160
1730 S=0:GOTO 160
1740 S=0:GOTO 160
1750 S=0:GOTO 160
1760 S=0:GOTO 160
1770 S=0:GOTO 160
1780 S=0:GOTO 160
1790 S=0:GOTO 160
1800 S=0:GOTO 160
1810 S=0:GOTO 160
1820 S=0:GOTO 160
1830 S=0:GOTO 160
1840 S=0:GOTO 160
1850 S=0:GOTO 160
1860 S=0:GOTO 160
1870 S=0:GOTO 160
1880 S=0:GOTO 160
1890 S=0:GOTO 160
1900 S=0:GOTO 160
1910 S=0:GOTO 160
1920 S=0:GOTO 160
1930 S=0:GOTO 160
1940 S=0:GOTO 160
1950 S=0:GOTO 160
1960 S=0:GOTO 160
1970 S=0:GOTO 160
1980 S=0:GOTO 160
1990 S=0:GOTO 160
2000 S=0:GOTO 160
2010 S=0:GOTO 160
2020 S=0:GOTO 160
2030 S=0:GOTO 160
2040 S=0:GOTO 160
2050 S=0:GOTO 160
2060 S=0:GOTO 160
2070 S=0:GOTO 160
2080 S=0:GOTO 160
2090 S=0:GOTO 160
2100 S=0:GOTO 160
2110 S=0:GOTO 160
2120 S=0:GOTO 160
2130 S=0:GOTO 160
2140 S=0:GOTO 160
2150 S=0:GOTO 160
2160 S=0:GOTO 160
2170 S=0:GOTO 160
2180 S=0:GOTO 160
2190 S=0:GOTO 160
2200 S=0:GOTO 160
2210 S=0:GOTO 160
2220 S=0:GOTO 160
2230 S=0:GOTO 160
2240 S=0:GOTO 160
2250 S=0:GOTO 160
2260 S=0:GOTO 160
2270 S=0:GOTO 160
2280 S=0:GOTO 160
2290 S=0:GOTO 160
2300 S=0:GOTO 160
2310 S=0:GOTO 160
2320 S=0:GOTO 160
2330 S=0:GOTO 160
2340 S=0:GOTO 160
2350 S=0:GOTO 160
2360 S=0:GOTO 160
2370 S=0:GOTO 160
2380 S=0:GOTO 160
2390 S=0:GOTO 160
2400 S=0:GOTO 160
2410 S=0:GOTO 160
2420 S=0:GOTO 160
2430 S=0:GOTO 160
2440 S=0:GOTO 160
2450 S=0:GOTO 160
2460 S=0:GOTO 160
2470 S=0:GOTO 160
2480 S=0:GOTO 160
2490 S=0:GOTO 160
2500 S=0:GOTO 160
2510 S=0:GOTO 160
2520 S=0:GOTO 160
2530 S=0:GOTO 160
2540 S=0:GOTO 160
2550 S=0:GOTO 160
2560 S=0:GOTO 160
2570 S=0:GOTO 160
2580 S=0:GOTO 160
2590 S=0:GOTO 160
2600 S=0:GOTO 160
2610 S=0:GOTO 160
2620 S=0:GOTO 160
2630 S=0:GOTO 160
2640 S=0:GOTO 160
2650 S=0:GOTO 160
2660 S=0:GOTO 160
2670 S=0:GOTO 160
2680 S=0:GOTO 160
2690 S=0:GOTO 160
2700 S=0:GOTO 160
2710 S=0:GOTO 160
2720 S=0:GOTO 160
2730 S=0:GOTO 160
2740 S=0:GOTO 160
2750 S=0:GOTO 160
2760 S=0:GOTO 160
2770 S=0:GOTO 160
2780 S=0:GOTO 160
2790 S=0:GOTO 160
2800 S=0:GOTO 160
2810 S=0:GOTO 160
2820 S=0:GOTO 160
2830 S=0:GOTO 160
2840 S=0:GOTO 160
2850 S=0:GOTO 160
2860 S=0:GOTO 160
2870 S=0:GOTO 160
2880 S=0:GOTO 160
2890 S=0:GOTO 160
2900 S=0:GOTO 160
2910 S=0:GOTO 160
2920 S=0:GOTO 160
2930 S=0:GOTO 160
2940 S=0:GOTO 160
2950 S=0:GOTO 160
2960 S=0:GOTO 160
2970 S=0:GOTO 160
2980 S=0:GOTO 160
2990 S=0:GOTO 160
3000 S=0:GOTO 160
3010 S=0:GOTO 160
3020 S=0:GOTO 160
3030 S=0:GOTO 160
3040 S=0:GOTO 160
3050 S=0:GOTO 160
3060 S=0:GOTO 160
3070 S=0:GOTO 160
3080 S=0:GOTO 160
3090 S=0:GOTO 160
3100 S=0:GOTO 160
3110 S=0:GOTO 160
3120 S=0:GOTO 160
3130 S=0:GOTO 160
3140 S=0:GOTO 160
3150 S=0:GOTO 160
3160 S=0:GOTO 160
3170 S=0:GOTO 160
3180 S=0:GOTO 160
3190 S=0:GOTO 160
3200 S=0:GOTO 160
3210 S=0:GOTO 160
3220 S=0:GOTO 160
3230 S=0:GOTO 160
3240 S=0:GOTO 160
3250 S=0:GOTO 160
3260 S=0:GOTO 160
3270 S=0:GOTO 160
3280 S=0:GOTO 160
3290 S=0:GOTO 160
3300 S=0:GOTO 160
3310 S=0:GOTO 160
3320 S=0:GOTO 160
3330 S=0:GOTO 160
3340 S=0:GOTO 160
3350 S=0:GOTO 160
3360 S=0:GOTO 160
3370 S=0:GOTO 160
3380 S=0:GOTO 160
3390 S=0:GOTO 160
3400 S=0:GOTO 160
3410 S=0:GOTO 160
3420 S=0:GOTO 160
3430 S=0:GOTO 160
3440 S=0:GOTO 160
3450 S=0:GOTO 160
3460 S=0:GOTO 160
3470 S=0:GOTO 160
3480 S=0:GOTO 160
3490 S=0:GOTO 160
3500 S=0:GOTO 160
3510 S=0:GOTO 160
3520 S=0:GOTO 160
3530 S=0:GOTO 160
3540 S=0:GOTO 160
3550 S=0:GOTO 160
3560 S=0:GOTO 160
3570 S=0:GOTO 160
3580 S=0:GOTO 160
3590 S=0:GOTO 160
3600 S=0:GOTO 160
3610 S=0:GOTO 160
3620 S=0:GOTO 160
3630 S=0:GOTO 160
3640 S=0:GOTO 160
3650 S=0:GOTO 160
3660 S=0:GOTO 160
3670 S=0:GOTO 160
3680 S=0:GOTO 160
3690 S=0:GOTO 160
3700 S=0:GOTO 160
3710 S=0:GOTO 160
3720 S=0:GOTO 160
3730 S=0:GOTO 160
3740 S=0:GOTO 160
3750 S=0:GOTO 160
3760 S=0:GOTO 160
3770 S=0:GOTO 160
3780 S=0:GOTO 160
3790 S=0:GOTO 160
3800 S=0:GOTO 160
3810 S=0:GOTO 160
3820 S=0:GOTO 160
3830 S=0:GOTO 160
3840 S=0:GOTO 160
3850 S=0:GOTO 160
3860 S=0:GOTO 160
3870 S=0:GOTO 160
3880 S=0:GOTO 160
3890 S=0:GOTO 160
3900 S=0:GOTO 160
3910 S=0:GOTO 160
3920 S=0:GOTO 160
3930 S=0:GOTO 160
3940 S=0:GOTO 160
3950 S=0:GOTO 160
3960 S=0:GOTO 160
3970 S=0:GOTO 160
3980 S=0:GOTO 160
3990 S=0:GOTO 160
4000 S=0:GOTO 160
4010 S=0:GOTO 160
4020 S=0:GOTO 160
4030 S=0:GOTO 160
4040 S=0:GOTO 160
4050 S=0:GOTO 160
4060 S=0:GOTO 160
4070 S=0:GOTO 160
4080 S=0:GOTO 160
4090 S=0:GOTO 160
4100 S=0:GOTO 160
4110 S=0:GOTO 160
4120 S=0:GOTO 160
4130 S=0:GOTO 160
4140 S=0:GOTO 160
4150 S=0:GOTO 160
4160 S=0:GOTO 160
4170 S=0:GOTO 160
4180 S=0:GOTO 160
4190 S=0:GOTO 160
4200 S=0:GOTO 160
4210 S=0:GOTO 160
4220 S=0:GOTO 160
4230 S=0:GOTO 160
4240 S=0:GOTO 160
4250 S=0:GOTO 160
4260 S=0:GOTO 160
4270 S=0:GOTO 160
4280 S=0:GOTO 160
4290 S=0:GOTO 160
4300 S=0:GOTO 160
4310 S=0:GOTO 160
4320 S=0:GOTO 160
4330 S=0:GOTO 160
4340 S=0:GOTO 160
4350 S=0:GOTO 160
4360 S=0:GOTO 160
4370 S=0:GOTO 160
4380 S=0:GOTO 160
4390 S=0:GOTO 160
4400 S=0:GOTO 160
4410 S=0:GOTO 160
4420 S=0:GOTO 160
4430 S=0:GOTO 160
4440 S=0:GOTO 160
4450 S=0:GOTO 160
4460 S=0:GOTO 160
4470 S=0:GOTO 160
4480 S=0:GOTO 160
4490 S=0:GOTO 160
4500 S=0:GOTO 160
4510 S=0:GOTO 160
4520 S=0:GOTO 160
4530 S=0:GOTO 160
4540 S=0:GOTO 160
4550 S=0:GOTO 160
4560 S=0:GOTO 160
4570 S=0:GOTO 160
4580 S=0:GOTO 160
4590 S=0:GOTO 160
4600 S=0:GOTO 160
4610 S=0:GOTO 160
4620 S=0:GOTO 160
4630 S=0:GOTO 160
4640 S=0:GOTO 160
4650 S=0:GOTO 160
4660 S=0:GOTO 160
4670 S=0:GOTO 160
4680 S=0:GOTO 160
4690 S=0:GOTO 160
4700 S=0:GOTO 160
4710 S=0:GOTO 160
4720 S=0:GOTO 160
4730 S=0:GOTO 160
4740 S=0:GOTO 160
4750 S=0:GOTO 160
4760 S=0:GOTO 160
4770 S=0:GOTO 160
4780 S=0:GOTO 160
4790 S=0:GOTO 160
4800 S=0:GOTO 160
4810 S=0:GOTO 160
4820 S=0:GOTO 160
4830 S=0:GOTO 160
4840 S=0:GOTO 160
4850 S=0:GOTO 160
4860 S=0:GOTO 160
4870 S=0:GOTO 160
4880 S=0:GOTO 160
4890 S=0:GOTO 160
4900 S=0:GOTO 160
4910 S=0:GOTO 160
4920 S=0:GOTO 160
4930 S=0:GOTO 160
4940 S=0:GOTO 160
4950 S=0:GOTO 160
4960 S=0:GOTO 160
4970 S=0:GOTO 160
4980 S=0:GOTO 160
4990 S=0:GOTO 160
5000 S=0:GOTO 160
5010 S=0:GOTO 160
5020 S=0:GOTO 160
5030 S=0:GOTO 160
5040 S=0:GOTO 160
5050 S=0:GOTO 160
5060 S=0:GOTO 160
5070 S=0:GOTO 160
5080 S=0:GOTO 160
5090 S=0:GOTO 160
5100 S=0:GOTO 160
5110 S=0:GOTO 160
5120 S=0:GOTO 160
5130 S=0:GOTO 160
5140 S=0:GOTO 160
5150 S=0:GOTO 160
5160 S=0:GOTO 160
5170 S=0:GOTO 160
5180 S=0:GOTO 160
5190 S=0:GOTO 160
5200 S=0:GOTO 160
5210 S=0:GOTO 160
5220 S=0:GOTO 160
5230 S=0:GOTO 160
5240 S=0:GOTO 160
5250 S=0:GOTO 160
5260 S=0:GOTO 160
5270 S=0:GOTO 160
5280 S=0:GOTO 160
5290 S=0:GOTO 160
5300 S=0:GOTO 160
5310 S=0:GOTO 160
5320 S=0:GOTO 160
5330 S=0:GOTO 160
5340 S=0:GOTO 160
5350 S=0:GOTO 160
5360 S=0:GOTO 160
5370 S=0:GOTO 160
5380 S=0:GOTO 160
5390 S=0:GOTO 160
5400 S=0:GOTO 160
5410 S=0:GOTO 160
5420 S=0:GOTO 160
5430 S=0:GOTO 160
5440 S=0:GOTO 160
5450 S=0:GOTO 160
5460 S=0:GOTO 160
5470 S=0:GOTO 160
5480 S=0:GOTO 160
5490 S=0:GOTO 160
5500 S=0:GOTO 160
5510 S=0:GOTO 160
5520 S=0:GOTO 160
5530 S=0:GOTO 160
5540 S=0:GOTO 160
5550 S=0:GOTO 160
5560 S=0:GOTO 160
5570 S=0:GOTO 160
5580 S=0:GOTO 160
5590 S=0:GOTO 160
5600 S=0:GOTO 160
5610 S=0:GOTO 160
5620 S=0:GOTO 160
5630 S=0:GOTO 160
5640 S=0:GOTO 160
5650 S=0:GOTO 160
5660 S=0:GOTO 160
5670 S=0:GOTO 160
5680 S=0:GOTO 160
5690 S=0:GOTO 160
5700 S=0:GOTO 160
5710 S=0:GOTO 160
5720 S=0:GOTO 160
5730 S=0:GOTO 160
5740 S=0:GOTO 160
5750 S=0:GOTO 160
5760 S=0:GOTO 160
5770 S=0:GOTO 160
5780 S=0:GOTO 160
5790 S=0:GOTO 160
5800 S=0:GOTO 160
5810 S=0:GOTO 160
5820 S=0:GOTO 160
5830 S=0:GOTO 160
5840 S=0:GOTO 160
5850 S=0:GOTO 160
5860 S=0:GOTO 160
5870 S=0:GOTO 160
5880 S=0:GOTO 160
5890 S=0:GOTO 160
5900 S=0:GOTO 160
5910 S=0:GOTO 160
5920 S=0:GOTO 160
5930 S=0:GOTO 160
5940 S=0:GOTO 160
5950 S=0:GOTO 160
5960 S=0:GOTO 160
5970 S=0:GOTO 160
5980 S=0:GOTO 160
5990 S=0:GOTO 160
6000 S=0:GOTO 160
6010 S=0:GOTO 160
6020 S=0:GOTO 160
6030 S=0:GOTO 160
6040 S=0:GOTO 160
6050 S=0:GOTO 160
6060 S=0:GOTO 160
6070 S=0:GOTO 160
6080 S=0:GOTO 160
6090 S=0:GOTO 160
6100 S=0:GOTO 160
6110 S=0:GOTO 160
6120 S=0:GOTO 160
6130 S=0:GOTO 160
6140 S=0:GOTO 160
6150 S=0:GOTO 160
6160 S=0:GOTO 160
6170 S=0:GOTO 160
6180 S=0:GOTO 160
6190 S=0:GOTO 160
6200 S=0:GOTO 160
6210 S=0:GOTO 160
6220 S=0:GOTO 160
6230 S=0:GOTO 160
6240 S=0:GOTO 160
6250 S=0:GOTO 160
6260 S=0:GOTO 160
6270 S=0:GOTO 160
6280 S=0:GOTO 160
6290 S=0:GOTO 160
6300 S=0:GOTO 160
6310 S=0:GOTO 160
6320 S=0:GOTO 160
6330 S=0:GOTO 160
6340 S=0:GOTO 160
6350 S=0:GOTO 160
6360 S=0:GOTO 160
6370 S=0:GOTO 160
6380 S=0:GOTO 160
6390 S=0:GOTO 160
6400 S=0:GOTO 160
6410 S=0:GOTO 160
6420 S=0:GOTO 160
6430 S=0:GOTO 160
6440 S=0:GOTO 160
6450 S=0:GOTO 160
6460 S=0:GOTO 160
6470 S=0:GOTO 160
6480 S=0:GOTO 160
6490 S=0:GOTO 160
6500 S=0:GOTO 160
6510 S=0:GOTO 160
6520 S=0:GOTO 160
6530 S=0:GOTO 160
6540 S=0:GOTO 160
6550 S=0:GOTO 160
6560 S=0:GOTO 160
6570 S=0:GOTO 160
6580 S=0:GOTO 160
6590 S=0:GOTO 160
6600 S=0:GOTO 160
6610 S=0:GOTO 160
6620 S=0:GOTO 160
6630 S=0:GOTO 160
6640 S=0:GOTO 160
6650 S=0:GOTO 160
6660 S=0:GOTO 160
6670 S=0:GOTO 160
6680 S=0:GOTO 160
6690 S=0:GOTO 160
6700 S=0:GOTO 160
6710 S=0:GOTO 160
6720 S=0:GOTO 160
6730 S=0:GOTO 160
6740 S=0:GOTO 160
6750 S=0:GOTO 160
6760 S=0:GOTO 160
6770 S=0:GOTO 160
6780 S=0:GOTO 160
6790 S=0:GOTO 160
6800 S=0:GOTO 160
6810 S=0:GOTO 160
6820 S=0:GOTO 160
6830 S=0:GOTO 160
6840 S=0:GOTO 160
6850 S=0:GOTO 160
6860 S=0:GOTO 160
6870 S=0:GOTO 160
6880 S=0:GOTO 160
6890 S=0:GOTO 160
6900 S=0:GOTO 160
6910 S=0:GOTO 160
6920 S=0:GOTO 160
6930 S=0:GOTO 160
6940 S=0:GOTO 160
6950 S=0:GOTO 160
6960 S=0:GOTO 160
6970 S=0:GOTO 160
6980 S=0:GOTO 160
6990 S=0:GOTO 160
7000 S=0:GOTO 160
7010 S=0:GOTO 160
7020 S=0:GOTO 160
7030 S=0:GOTO 160
70
```

Open Forum

from previous page

Dependent on value found here, S and ZS are assigned values to correspond to top left of grid.

129-158 Draws grid.

185-250 Movement of cursor around grid, plotting or moving as required.

329-418 Computes value of each point on grid and stores same in array A(K,J).

458-500 Saves characters to tape.

In Line 480 A is given the value corresponding to the current array A(K,J) value. Variable A is then saved.

This avoids the necessity of dimensioning an array in the program which is to use the new characters. On running the program a grid of + signs is displayed, each corresponding to a point on the character. Use the cursor control keys to move around the grid.

Type M to move without plotting, P to plot a point, F when character is finished. Should the display be ruined, for instance by hitting the stop key by mistake, typing R will redraw the grid and allow you to start over with the current character.

Program B can be inserted into your program to input the new characters from tape, poking them into memory locations determined by variable P.

Saturn

on BBC Micro

The following program draws a spectacular view of Saturn, viewed approximately 200,000 miles away from its surface and roughly at latitude 30°.

At the start 150 stars of different colours are plotted while the planet begins to be drawn throughout the program. They are constantly changing colour but not position.

Accompanying the program as the drawing is taking place two sound channels are used. One increases in pitch while the other decreases at the same time giving a weird effect.

After the sixth and final ring has been drawn there is a short climax as the pitch steadily rises up to its highest value. Sound channel 0 is then used, while a rapid flashing of the planet and its rings start progressively. With a humorous finale a French alien from Mars drops out of the top of the screen and plants a flag at the North Pole, pronouncing the planet his.

The program lasts for five minutes.

At the start the alien shape is defined together with the shape of the flag.

Next comes star position determination, where 150 stars are put in the array A(2,150), A(1,7) being x co-ordinate and A(2,7) being Y co-ordinate.

As the program progresses in the middle of the loop at line 110 two of the stars colours are changed — not more than this

Character plot Program B

```
10 PRINT "STARTING LOCATION OF NEW CHARACTERS" : INPUT P
20 PRINT "READY TAPE OF SAVED CHARACTERS"
30 OPEN 1:1:0
40 INPUT#1,N
50 FORK=0TON#0-1
60 INPUT#1,R
70 POKEP+K,R
80 NEXTK
90 CLOSE1
```

PROGRAM OF THE WEEK

SATURN

Saturn
by Peter Donn

```
10 N=600:IN=500:DIMX(2,150):MODE 2
20 VDU2:224,1,3,13,21,37,39,6,16
30 VDU23,225,0,126,96,80,72,200,32,16
40 VDU23,226,248,248,248,248,128,128,128,128
50 FOR A=0 TO 150
60 L=RND(1250):P=RND(1020):A(1,A)=L:A(2,A)=P:NEXT A
70 E=0:IN=360:MOVEN,N
80 E=E+1
90 IF E=8 THEN 300
100 READ B,C:FOR A=0 TO 360:GCOL0,RND(7)
110 FOR Q=0 TO 2:R=RND(150):PLOT6,9,A(1,R),A(2,R):NEXT:GCOL0,E
120 PROCSaturn
130 SOUND1,22,A,1:SOIN2,22,B-A,1:NEXT:GOTO 30
140 DEF PROCSaturn
150 G=RAD(A):X=8*COS(D):Y=C*SIN(D):H=X*N:I=Y*N
160 IF POINT(H,I)=1 AND A<180 THEN 180
170 PLOT6,9,H,I:IF B=220 DRAW600,500
180 MOVEN,N:ENDPROC
190 DATA220,300,600,100,550,90,500,80,560,70,530,60,500,50
200 FOR A=0 TO 255:SOUND1,22,A,1:NEXT A:VDU19,1,9,0,0,0:"FX 9,2
210 "FX 10,2
220 FOR Z=22 TO 37:SOUND0,2,100,10:NEXT:FOR A=10 TO 15:VDU19,A=8,
A,0,0,0:FOR Z=0 TO 500:NEXT Z:NEXT A
230 VDU5
240 VDU19,7,1,0,0,0,19,0,0,0,0,0
250 FOR A=1024 TO 735 STEP15
260 GCOL0,7
270 MOVE 260,A
```


Open Forum

otherwise the program will be slowed down too much. Overall this gives a twinkling effect throughout the program.

The point command is used in line 160 to make sure the rings go round the back of Saturn. At the heart of the program is the formula that draws the planet and its rings: $X = \text{angle} \times \cos(\text{length})$, $Y = \text{angle} \times \sin(\text{length})$ — line 150, not forgetting to change from degrees to radians.

There is only one procedure in the program — PROCsaturn, which does all the drawing and sound effects.

In order to achieve the fast flashing at the end of the program two "FX" commands are used, "FX 9" and "FX 10". Apart from the features mentioned the program is fairly simple.

That is all except that in the near future I hope many people will be able to sit back on an evening with their lights off in their dining room admiring their computer's spectacular graphics, and a beautiful view of our most interesting planet!

```
280 PRINT CHR$(224)CHR$(225)
290 SOUND1,-15,A/4-1,1
300 FOR Z=0 TO 300:NEXT
310 GOTO 0
320 MOVE 560,A:PRINT CHR$(224)CHR$(225)
330 NEXT A
340 GOTO 7:MOVE 560,A:PRINT CHR$(224)CHR$(225)
350 MOVE 675,A:PRINT CHR$(226):VDU 4
360 FOR A=0 TO 8
370 READ B,C
380 SOUND1,-15,B,C*8
390 NEXT
395 END
400 DATA 1,1,81,-5,101,1,101,1,109,1,109,1,129,2,117,-5,101,1
```

Atomic regression

On Atom

Regression is a program written in Atom Basic which will calculate and then plot the best fitting straight line through a given set of points. Although mainly of a mathematical nature the listing does include a number of useful routines that the reader with a non-mathematical bent might also find interesting.

Its applications are many fold. Imagine being able to impress your boss with predictions of next month's sales figures. You could tabulate the display average monthly sightings of the light-mantled Sooty Albatross at the local Ornithological Society or even the mean number of moves taken before being defeated by Rubik's Cube for the umpteenth time.

Regression requires an expanded Atom with the floating point Rom and a full 6K of screen memory. The listed length of slightly under 3K is intended mainly for clarity and can readily be reduced to about 1.5K

by abbreviating commands and using multi-statement lines.

Linear regression, as it is more correctly known, expresses the relationship between X and Y values in the form: $Y = ax + b$. The problem is to determine the constant a, called the regression coefficient, and b, so that the straight line to be plotted can be considered as the best fit to the given set of values of X and Y.

The method is that of the least squares. This technique sets about minimising the errors that are bound to occur when attempting to obtain a best fit. The equations for the least square method can be expressed as:

$$a = \frac{n \sum xy - \sum x \sum y}{n \sum x^2 - (\sum x)^2}$$

$$b = \frac{\sum y - a \sum x}{n}$$

\sum denotes "sum of". Thus $\sum x$ reads "the sum of all the x values", n is the number of points. This will produce the equation for the line of Y regressing on X.

Those wishing further information on

this operation should be able to obtain it from any reasonable statistics book.

On running, the screen will clear and request you to input the number of points to be plotted. These should then be entered as X and Y values in response to the Atom's prompts. Lines 210 and 250 call subroutine k — lines 1060 to 1090 — if the number of points exceeds four. This routine, which links to FEQA hex in the Basic interpreter Rom, is included to present a more acceptable screen format and can keep up to seven of the top screen lines static whilst scrolling the rest of the screen up a single line.

The number of unscrolled lines is determined by the contents of the Y index register. As the low order bytes of Basic's A, X and Y variables are transferred to their respective 6502 registers when the LINK command is executed, it is a simple matter to seed this value. The formula is simply:

$$Y = (n-32) + 32$$

n is the number of lines — 0 to 7 — to be left unscrolled.

Atomic regression by Bruce Smith

```
10 REM**LINEAR REGRESSION
20 DIM C(20)
30 GOSUB 10000:PRINT "REGRESSION"
40 DT=0.128
50 PRINT "X Y"
60 GOTO 100
70 REM**GET CO-ORDINATES
80 REM**CALCULATE REGRESSION COEFFICIENT
90 REM**NO. OF POINTS
100 DIM A(20)
110 INPUT "X Y COORDINATES:"
120 FOR N=1 TO J
130 PRINT "X Y"

```

```
160 PRINT "X Y"
170 A(N)=X:Y(N)=Y
180 PRINT "X Y"
190 IF N=J GOTO 200
200 PRINT "X Y"
210 IF N=J GOTO 200
220 PRINT "X Y"
230 IF N=J GOTO 200
240 IF N=J GOTO 200
250 IF N=J GOTO 200
260 PRINT
270 NEXT
280 A(21)=SUM(X)
290 Y(21)=SUM(Y)
300 REM**SHELL SORT X COORDS
310 N=2
320 DO
330 M=(N+1)/2
340 FOR I=N+1 TO J
```

to next page

Open Forum

```

FOR N=1 TO N1 STEP 1
260 U=U-M
270 IF ABS(U) < .01 THEN GOTO 310
280 T=ABS(U)/ABS(U+1)
290 GOTO 310 IF T < .01
300 NEXT N
310 NEXT A
320 UNTIL N=2
330 REM*** CALCULATE GRADIENT
340 REM*** OF GRAPH TO BE PLOTTED
350 X=1/X
360 S=1/(X-1)
370 REM***END X,Y COORDS
380 SCREEN=0
390 REM*** SCREEN EXCEPT
400 REM*** TOP TWO LINES
410 Y=0
420 FOR N=1 TO 10
430 LINE X,Y#0
440 NEXT
450 PRINT "X,Y"
460 PRINT "LINE LINE BETWEEN X,Y COORDS 1"
470 PRINT "AND "
480 PRINT "DIVISION OF GRAPH IS"
490 PRINT "X,Y"
500 FOR N=1 TO 10
510 LINE X,Y#0
520 PRINT "X,Y"
530 PRINT "PRESS SPACE TO DISPLAY GRAPH"
540 PRINT "PRESS SPACE TO DISPLAY COORDS"
550 IF N=1 THEN GOTO 570
560 LINE X,Y#0
570 GOTO 570
580 GOTO 570
590 GOTO 570
600 GOTO 570
610 GOTO 570
620 GOTO 570
630 GOTO 570
640 GOTO 570
650 GOTO 570
660 GOTO 570
670 GOTO 570
680 GOTO 570
690 GOTO 570
700 GOTO 570
710 GOTO 570
720 GOTO 570
730 GOTO 570
740 GOTO 570
750 GOTO 570
760 GOTO 570
770 GOTO 570
780 GOTO 570
790 GOTO 570
800 GOTO 570
810 GOTO 570
820 GOTO 570
830 GOTO 570
840 GOTO 570
850 GOTO 570
860 GOTO 570
870 GOTO 570
880 GOTO 570
890 GOTO 570
900 GOTO 570
910 GOTO 570
920 GOTO 570
930 GOTO 570
940 GOTO 570
950 GOTO 570
960 GOTO 570
970 GOTO 570
980 GOTO 570
990 GOTO 570

```

Bridge deal

on Pet

Bridge players can never have too much practice in bidding on diverse hands, but it does get rather tiresome continually dealing out the cards for this purpose. I've never been madly keen on Pet graphics, but one thing they can do well is produce the symbols for the suits of cards.

Four columns of thirteen cards each are printed on the screen, having been dealt at random by the use of the RND function. The ace is quite properly numbered 1. The picture cards are also left as numbers 11 (Jack), 12 (Queen) and 13 (King), since they represent the points value of each of these cards and can thus be a useful reminder when totalling the value of the hand.

The hands of each partner are printed adjacently, so that it is easier to see how well they could support each other in play.

Bridge deal

by Gordon Milington

```

1 REM BRIDGE DEAL BY GORDON HILLINGTON
2 PRINT "I"
3 PRINTTAB(12);"BRIDGE DEAL";PRINT "PRINT"
4 PRINT "NORTH-TAB(10);"SOUTH-TAB(20);"EAST-TAB(30);"WEST"
5 PRINT
6 PRINT
7 DIM FL(52);DS(52)
8 DO WHILE (RND<RND(0))
9   FOR I=1 TO 52
10    CN=S2#RND(1)+1
11    IF FL(CN)=0 GOTO 40
12    DS(I)=CN#FL(CN)=1
13    IF CN(13) THENPRINT CHR$(120);CN;
14    IF CN(13) ANDCN(27) THENPRINTCHR$(211);CN-13;
15    IF CN(26) ANDCN(40) THEN PRINTCHR$(218);(CN-26);
16    IF CN(39) THENPRINTCHR$(216);(CN-39);
17 PRINT,
18 NEXT I
19 PRINT "PRINT"
20 PRINT "13=KING; 12=QUEEN; 11=JACK; 1=ACE"

```

Open Forum

Instant screen

on 2Y81

I had a program which needed to use a mixture of print and scroll statements, giving a table of results, then a series of scrolled newflashes and then an updated table of results.

This was all very slick except that it took about 30 seconds to clear the screen after the scroll and so spoiled the effect.

My son was writing a space chase game and wanted a black screen. This was also spoiled by the delay while the screen was printed.

Here is a routine which will solve the problem. First type in:

```
1 REM ECRND(graphic 1) CHR$(graphic  
2)??RETURN?C(graphic 7)/Y(graphic space)??(in-  
verse LOC54.ET
```

Return and Let are both entered by using THEN, moving the cursor back and erasing the THEN.

There are no spaces entered between characters. There are four instructions we cannot enter from the keyboard. These are represented by ? in the listing. We must enter those one at a time using the following instructions.

POKE 16521,128

POKE 16823,118

PCWSE 10528.119

PCWE 16530,125

To call the

16514. You will then get a black screen. To clear the screen type POKE 16527,0.

To check that it works write a short program to print something to the screen.

Try, for example:

```
10 FOR I = 1 TO 21
```

280 PRINT "32 of any

DO NEXT:

40 RAND USR 19514

You can fill the screen with any letter, number or graphic character you wish simply by using the command, either directly or as part of the program, POKE 16527,X, where X is the number representing the character you want, as given in the back of the Sinclair ZX081 manual.

To use this routine add the line LET XX = USR 16514. You could use RAND USR 16514 but if you are using RND in your listing the same sequence of numbers will always occur.

A catch is that you must reset the print position after each time the routine is used. Do this by making the next PRINT command PRINT AT 0,0; or any desired position, or else you may get an error 5 — screen full — code, even though the screen is empty.

This routine can also be used to fill or clear any number of lines on the screen. Table 1 gives the numbers you will need to POKE 16518 and POKE 16519, either as a direct command or as part of a program.

turn to next page

Instant screen
by Roger Edey

TABLE 1

LINES TO PRINT/CLEAR	1	2	3	4	5	6	7
POKE 16518:	65	99	131	164	197	230	
POKE 16519:	0	0	0	0	0	0	1
LINES TO PRINT/CLEAR	9	10	11	12	13	14	15
POKE 16518:	41	74	107	140	173	206	239
POKE 16519:	1	1	1	1	1	1	1
LINES TO PRINT/CLEAR	16	17	18	19	20	21	
POKE 16518:	15	49	82	115	148	181	
POKE 16519:	2	2	2	2	2	2	
LINES TO PRINT/CLEAR	22	23	24				
POKE 16518:	22	247	23				
POKE 16519:	2	2	2				

TABLE 2

DECIMAL ADDRESS	HEXCODE	OPCODE	M/C BYTES	BASIC EQUIVALENT	BASIC BYTES
15514/5/6	2A 8C 48	LD HL, (D FILE)	3	LET X=PEEK 16396+256*PEEK 16397	26
15517/8/9	91 D5 02	LD BC, C0D5	3	LET Y=725	11
15520	23	INC HL	1	LET X=X+1	10
15521	7E	LD A, (HL)	1	LET Z=PEEK X	11
15522/3	FE 76	CP 76	2	IF Z=118	
15524/5	28 83	JR Z+3 (lines)	2	THEN GOTO	10
15526/7	3E 80	LD A, 80	2	LET Z=128	
15528	77	LD (HL), A	1	POKE X,Z	9
15529	09	DEC BC	1	LET Y=Y-1	11
15530	7B	LD A,B	1	LET Y=Y-1	
15531	81	OR C	1	LET Y=Y-Y	
15532	C8	RET Z	1	IF Y=0 THEN RETURN	
15533/4	18 F1	JR-15 (lines)	2	GOTO	8

TOTAL M/C BYTES=27

(INC LINE No. AND REM)

TOTAL BASIC BYTES=123

(INC LINE No.)

Solitaire
by Colin McCormick

```

10 POKED679.25
11 PRINT"2"
12 I=0:W=50:J=0:W=50:J=0:W=50
13 FOR I=1 TO 49:FOR J=1 TO 4:HEX=INT(42+RND(42))
14 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
20 POKED680.242:PRINT"THIS PROGRAM ALLOWS YOU TO PLAY SOLITAIRE ON THE COMPU
TER AND:"
21 PRINT"CHECKS THE VALIDITY OF YOUR MOVES."PRINT"LOST PEOPLE PLAY WITH
OUT:"
22 PRINT"32RANKS, BUT IF YOU WANT 32RANK, MOVES TYPE 'Y'."
23 PRINT"PRINT PRINT PRINT"
24 GET$:"IF$="Y" THEN$24
25 IF$="V" THEN$25
26 PRINT"
27 PRINT"
28 PRINT"
29 PRINT"
30 PRINT"
31 PRINT"
32 PRINT"
33 PRINT"
34 PRINT"
35 PRINT"
36 PRINT"
37 PRINT"
38 PRINT"
39 PRINT"
40 PRINT"
41 PRINT"
42 PRINT"
43 PRINT"
44 PRINT"
45 PRINT"
46 PRINT"
47 PRINT"
48 PRINT"
49 PRINT"
50 FOR I=1 TO 49:FOR J=1 TO 4:HEX=INT(42+RND(42))
51 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
52 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
53 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
54 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
55 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
56 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
57 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
58 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
59 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
60 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
61 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
62 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
63 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
64 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
65 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
66 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
67 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
68 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
69 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
70 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
71 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
72 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
73 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
74 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
75 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
76 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
77 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
78 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
79 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
80 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
81 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
82 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
83 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
84 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
85 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
86 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
87 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
88 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
89 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
90 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
91 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
92 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
93 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
94 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
95 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
96 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
97 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
98 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
99 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=
100 FOR I=1 TO 49:REND(J):TOO=HEX:TOO=

```

Open Forum

from previous page

It also gives the number of lines, from the top, which will be cleared or filled.

Table 2 gives the complete routine. The first number is the decimal address, followed by the hex code, the op code, the number of bytes for each instruction and finally the equivalent Basic commands and the bytes that they would use.

Solitaire

on Vic-20

There seem to be so many programs for shooting down little aliens. So, for a change, here is a program that suits an old game, but with colour and sound, and no cheating.

The game is written for the Vic-20, but as the positions are plotted using print statements — lines 1010 to 1030 — it should be converted to other machines.

An array is used for setting up which pegs are and are not present. A '1' is a peg, a '2' is no peg. The data is used to give the co-ordinates of each peg. The zeros indicate that a position does not exist. The pegs are arranged as shown and are displayed this way on the screen.

		3	4	5		
		10	11	12		
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	31	32	33	34	35
		38	39	40		
		45	46	47		

Each position has a mathematical relationship with its neighbours. This allows the calculation for checking the validity of moves to be quite simple — lines 770 to 800 and 7000 to 7003.

When the game is run, it will ask you if you want diagonal moves. If you reply Y then it will go to line 7000 to check for diagonal moves when the game is played. R is the position being moved from, S is the position being moved to, and L is the peg being taken.

Subroutine 4035 erases the top line for the next instruction or message. A peg shown on the screen in red and is shown removed in light yellow. Lines 2040 to 2080 see if only one peg remains, and if so the game stops. If this last peg is the centre one, 25, then a message of congratulations is shown.

Snaky letters

on BBC Micro

This program contains adequate instructions. I advise you, however, to start with the lowest speed.

If you prefer to use different keys to
to next page

```

0000 ORG=00000000
0000 GC70000
1000 PRINT"
1010 FORK=1000:PRINT"K="NEXTK
1020 IFK=11000:PRINTSPC;"T3-2";GOTO10
1030 IFK=11000:PRINTSPC;"T3-2";GOTO10
1040 PRINT"K="RETURN
1050 PRINT"K=EXT MOVE "FORK=15000STEP-1
2000 POKE36076,200
2010 POKE36075,K
2020
2030 NEXTK
2040 W=0 FORK=1000
2050 IFK=11000:GOTO2070
2060 IFK=11000:GOTO2070
2070 W=W+1
2075 W=W+1
2085 NEXTK
2090 IFK=11000:GOTO2070
2100 FORK=15000STEP-2
4010 POKE36075,K
4020 POKE36076,K*17
4030 NEXTK
4040 PRINT"
4050
4060 RETURN
4070
4080
4090
4100
4110
4120
4130
4140
4150
4160
4170
4180
4190
4200
4210
4220
4230
4240
4250
4260
4270
4280
4290
4300
4310
4320
4330
4340
4350
4360
4370
4380
4390
4400
4410
4420
4430
4440
4450
4460
4470
4480
4490
4500
4510
4520
4530
4540
4550
4560
4570
4580
4590
4600
4610
4620
4630
4640
4650
4660
4670
4680
4690
4700
4710
4720
4730
4740
4750
4760
4770
4780
4790
4800
4810
4820
4830
4840
4850
4860
4870
4880
4890
4900
4910
4920
4930
4940
4950
4960
4970
4980
4990
5000
5010
5020
5030
5040
5050
5060
5070
5080
5090
5100
5110
5120
5130
5140
5150
5160
5170
5180
5190
5200
5210
5220
5230
5240
5250
5260
5270
5280
5290
5300
5310
5320
5330
5340
5350
5360
5370
5380
5390
5400
5410
5420
5430
5440
5450
5460
5470
5480
5490
5500
5510
5520
5530
5540
5550
5560
5570
5580
5590
5600
5610
5620
5630
5640
5650
5660
5670
5680
5690
5700
5710
5720
5730
5740
5750
5760
5770
5780
5790
5800
5810
5820
5830
5840
5850
5860
5870
5880
5890
5900
5910
5920
5930
5940
5950
5960
5970
5980
5990
6000
6010
6020
6030
6040
6050
6060
6070
6080
6090
6100
6110
6120
6130
6140
6150
6160
6170
6180
6190
6200
6210
6220
6230
6240
6250
6260
6270
6280
6290
6300
6310
6320
6330
6340
6350
6360
6370
6380
6390
6400
6410
6420
6430
6440
6450
6460
6470
6480
6490
6500
6510
6520
6530
6540
6550
6560
6570
6580
6590
6600
6610
6620
6630
6640
6650
6660
6670
6680
6690
6700
6710
6720
6730
6740
6750
6760
6770
6780
6790
6800
6810
6820
6830
6840
6850
6860
6870
6880
6890
6900
6910
6920
6930
6940
6950
6960
6970
6980
6990
7000
7010
7020
7030
7040
7050
7060
7070
7080
7090
7100
7110
7120
7130
7140
7150
7160
7170
7180
7190
7200
7210
7220
7230
7240
7250
7260
7270
7280
7290
7300
7310
7320
7330
7340
7350
7360
7370
7380
7390
7400
7410
7420
7430
7440
7450
7460
7470
7480
7490
7500
7510
7520
7530
7540
7550
7560
7570
7580
7590
7600
7610
7620
7630
7640
7650
7660
7670
7680
7690
7700
7710
7720
7730
7740
7750
7760
7770
7780
7790
7800
7810
7820
7830
7840
7850
7860
7870
7880
7890
7900
7910
7920
7930
7940
7950
7960
7970
7980
7990
8000
8010
8020
8030
8040
8050
8060
8070
8080
8090
8100
8110
8120
8130
8140
8150
8160
8170
8180
8190
8200
8210
8220
8230
8240
8250
8260
8270
8280
8290
8300
8310
8320
8330
8340
8350
8360
8370
8380
8390
8400
8410
8420
8430
8440
8450
8460
8470
8480
8490
8500
8510
8520
8530
8540
8550
8560
8570
8580
8590
8600
8610
8620
8630
8640
8650
8660
8670
8680
8690
8700
8710
8720
8730
8740
8750
8760
8770
8780
8790
8800
8810
8820
8830
8840
8850
8860
8870
8880
8890
8900
8910
8920
8930
8940
8950
8960
8970
8980
8990
9000
9010
9020
9030
9040
9050
9060
9070
9080
9090
9100
9110
9120
9130
9140
9150
9160
9170
9180
9190
9200
9210
9220
9230
9240
9250
9260
9270
9280
9290
9300
9310
9320
9330
9340
9350
9360
9370
9380
9390
9400
9410
9420
9430
9440
9450
9460
9470
9480
9490
9500
9510
9520
9530
9540
9550
9560
9570
9580
9590
9600
9610
9620
9630
9640
9650
9660
9670
9680
9690
9700
9710
9720
9730
9740
9750
9760
9770
9780
9790
9800
9810
9820
9830
9840
9850
9860
9870
9880
9890
9900
9910
9920
9930
9940
9950
9960
9970
9980
9990

```

[illegible]

Open Forum

from previous page

control movement just change the letters in lines 150-180.

The scoring in this game is complex, but basically A scores 1 and Z 26. Other letters score according to their position in the alphabet when you hit them. This score is displayed at the bottom of the screen. At the end of the game this score is scaled according to the speed to give an actual score.

Currency

on ZX81

Currency is for any ZX81 Basic 1K unit. It will convert currency A to currency B and vice versa.

When the program is first run it requires a conversion line which needs the amount of currency A per unit currency B. The program assumes that the answer is wanted to two decimal places. The signs used to denote each currency must be only one character, placed before the number.

If the currencies used are pounds and Deutsche Marks we could use £ and D. Supposing we know 4.2DM = £1, then enter the conversion line D4.2£.

Currency

by Nick Causton

```
"CURRENCY"      BY N.CAUSTON

10 PRINT "ENTER (SIGN CURREN
Y: A) (AMOUNT CURRENCY A PER UNIT
CURRENCY B) (SIGN CURRENCY B)"
20 INPUT A$
30 LET M=VAL A$(2 TO LEN A$-1)
40 CLS
50 PRINT AT 1,0;A$(1) TO LEN A$-
1);" TO THE ";A$(LEN A$)
60 SCROLL
70 PRINT AT 7,0;"ENTER SIGN,AM
OUNT FOR CONVERSION"
80 INPUT U$
90 PRINT AT 7,0;" ";AT 7,0;U$;"
= "
100 IF U$(1)=A$(LEN A$) THEN PR
INT A$(1),INT (VAL U$(2 TO )/M*
100)/100
110 IF U$(1)=A$(1) THEN PRINT U
$(LEN A$),INT (VAL U$(2 TO )/M*
100)/100
120 SCROLL
130 SCROLL
140 GOTO 70
```

Win the great new ZX Spectrum

All you have to do to enter this award scheme is send us a program in one of the following categories: (a) Games; (b) Educational/Scientific; (c) Business/Office; (d) Utility.

Programs for each category should be accompanied by a cassette, a copy of the listing and full documentation. Points will be awarded for use of machine code, innovation, structure and ease of use.

The overall winner will receive a ZX Spectrum and Printer. Individual category winners will be awarded £30 of software, and 24 runners-up will receive programming merit awards.

A competition coupon will be published in each issue of Popular Computing Weekly for the next five weeks. To enter the competition, you must send in your program together with any four differently numbered coupons to:

Popular Computing Weekly,
Programming Award Scheme,
Hobhouse Court,
19 Whitcomb Street,
London WC2.

Rules

- There is no limit on the number of entries you can send in, but each entry must be accompanied by four differently numbered competition coupons.

- Closing date for entries is August 16, 1982.
- The names of the winners will be announced in the September 16 issue of Popular Computing Weekly.
- The judges' decision is final.
- No employees of Sunshine Publications Ltd. or their families, will be eligible to enter the competition.

Popular Computing Weekly Programming Award Scheme

Fill in this coupon. When you have collected four differently numbered coupons, send them with your program to: Popular Computing Weekly, Programming Award Scheme, Hobhouse Court, 19 Whitcomb Street, London WC2.

NAME:

ADDRESS:

PROGRAM CATEGORY:



Programming

A numbering program you can count on

David Lawrence presents a basic re-numbering routine for the ZX81.

For those of you who have not lashed out and bought a machine code re-number facility, this basic routine will be of considerable interest. Though by no means as fast as a machine code re-number program — this routine takes around 30 seconds to re-number an average 1K program — this ZX81 basic re-numbering routine does the job. It requires just over 1K and includes the re-numbering of GOTOs and GOSUBs.

The routine is intended to be loaded at the beginning of a program. It should be saved as part of the program during its development, though you may wish to delete it when the program is finalised.

The routine re-numbers all lines before 9959, starting at 1000 with a gap of 10 between the lines. If you wish to have another base, or another gap, alter the variable base in line 9976 or the increment in line 9987. Once familiar with the working of the routine, you may also wish to shorten it by reducing the variable names to single letters. This saves over 100 bytes.

To use the routine, enter GOTO 9959.

9959 TS is the string used to store the location of the various GOTOs and GOSUBs in the program.

9962 Line is simply the line number of the line currently being examined.

9964 Length is the value of the two bytes which store the number of characters in each line.

9972 An error warning will occur when the GOTO or GOSUB destination does not have 4 digits, eg GOTO 20 should be altered to GOTO 0020. If this error message occurs, alter the relevant command and re-run.

9974 The address of the GOTO/GOSUB is recorded in TS along with the destination.

9982 Having recorded in TS all the GOTO/GOSUBs, this loop examines TS on the second pass through the program to see if the line about to be re-numbered has a GOTO/GOSUB referring to it.

9985 The line is re-numbered.

9987 The next line number is created.

9988 The next existing line number is picked up.

9990 GOTO/GOSUB destinations are recorded twice in a program line, once simply as characters, and once in floating point notation. This loop pokes the characters of the new line number into the bytes holding the former.

9993 These lines transform any integer number in the range 1-32767 into the first three bytes of the ZX81's floating point notation.

*9995 This line jumps past REM statements. If you wish to use a non-standard GOTO/GOSUB like GOTO X, simply insert a REM at the beginning of the line and you will not run into the error message at line 9972.

```

9959 LET TS=""
9960 LET X1=16509
9961 LET X2=X1+2
9962 LET LINE=256*PEEK X1+PEEK (
X1+1)
9963 IF LINE>=9959 THEN GOTO 997
0
9964 LET LENGTH=PEEK X2+256*PEEK
(X2+1)
9965 IF PEEK (X2+2)=234 THEN GOT
0 9969
9966 FOR I=X2+2 TO X2+LENGTH
9967 IF PEEK I=236 OR PEEK I=237
THEN GOSUB 9971
9968 NEXT I
9969 LET X1=X2+LENGTH+2
9970 GOTO 9961
9971 IF PEEK (I+5)=126 THEN GOTO
9974
9972 PRINT "NON-STANDARD COMMAND
'LINE ";LINE
9973 STOP
9974 LET TS=TS+STR$ I+CHR$ PEEK
(I+1)+CHR$ PEEK (I+2)+CHR$ PEEK
(I+3)+CHR$ PEEK (I+4)
9975 RETURN
9976 LET BASE=1000
9977 LET X1=16509
9978 LET X2=X1+2
9979 LET LINE=256*PEEK X1+PEEK (
X1+1)
9980 IF LINE>=9959 THEN STOP
9981 LET LENGTH=PEEK X2+256*PEEK
(X2+1)
9982 FOR I=1 TO LEN TS STEP 9
9983 IF VAL T$(I+5 TO I+8)=LINE
THEN GOSUB 9990
9984 NEXT I
9985 POKE X1,INT (BASE/256)
9986 POKE (X1+1),BASE-256*INT (B
ASE/256)
9987 LET BASE=BASE+10
9988 LET X1=X2+LENGTH+2
9989 GOTO 9978
9990 FOR J=1 TO 4
9991 POKE (VAL T$(I TO I+4)+J),C
ODE (STR$ BASE)(J)
9992 NEXT J
9993 LET BYTE1=128+INT (LN BASE/
LN 2+1)
9994 LET BYTE2=BASE*65536/(2+*(B
YTE1-128))
9995 LET MEMORY=VAL T$(I TO I+4)
9996 POKE MEMORY+6,BYTE1
9997 POKE MEMORY+7,INT (BYTE2/25
6)-128
9998 POKE MEMORY+8,BYTE2-256*INT
(BYTE2/256)
9999 RETURN

```

Spectrum

in this new slot various contributors explore different aspects of the ZX Spectrum.

The rainbow route to rotating arcs

Nick Hampshire with more programs demonstrating PLOT and DRAW.

In this series I have already gone into some detail about how the Draw and Plot commands can be used on the Spectrum. They are quite adequate for most applications although the users of more sophisticated computers may well find them somewhat cumbersome.

With a bit of thought, however, we can create some very interesting effects.

Last week I introduced the Circle command as the basis for drawing a piechart. In the first program, the command was used in a program loop and the radius from the centre of the disc was varied on each step. The distance between each of the set of concentric circles could be altered but we discovered that that was about all we could do with the Circle command.

The drawbacks we found with the Circle Command were that: (a) the spacing between the dots in each concentric circle could not be varied, and (b) it was impossible to draw a segment of a disc.

In Figure 1 you will find another program for drawing a circle, developed from the one I presented last week. XO and YO are the co-ordinates for the centre, RA is the radius and DP is the angle between the points. It is only a short step from using the circle program in Figure 1 to drawing arcs.

There is a listing for just such a program in Figure 2. P1 is the start angle and P2 is the end angle.

In Figure 3 I have taken the program one stage further. The program draws a series of arcs, within a loop, forming a number of concentric arcs with the spacing between the arcs changing every fourth run in the loop.

To add to the effect the colour of the points are changed on each step. The result is an image of a rainbow. The colour codes are held in the data statement in line 400, read in line 80 and acted on in line 85.

The next stage is to add some movement to the graphic figures we have created. Figure 4 is a program with which to rotate the picture. All the program does is rotate a point about the centre of the circle, at co-ordinates X, Y

in a radius XR. To do this I have used a matrix transform technique.

The matrix is stored in array C and is loaded in lines 1200—1240. The rotation is performed by lines 1000—1020. The plotting is controlled in lines 100—210. R1 is the incremented angle and XR is the radius.

Finally for this week is the program in Figure 5. It is the same as Figure 4 except that it rotates a line instead of a point. XR is the inside radius of the line, starting relative to the centre. XE is the outside radius of the line, relative to the centre and R1 is the incremented angle.

Next week I will develop some more sophisticated rotating graphic programs and, if there is space, start introducing some ideas about three-dimensional graphics.

In the meantime I hope that some of you will soon have your Spectrums delivered. When you do let me know if you can find simpler ways of creating any of the same effects.



Fig. 1



Fig. 2




Fig. 3




Fig. 4



Fig. 5

Sound & vision



Going traditional with Pet sounds

Greensleeves and The Yellow Rose of Texas are both programs which play songs on the Commodore Vic20. The heart of the Greensleeves program lies in line 20, which pokes all the data into the Vic20. The data statements, which tell the Vic20 which note to play, are contained in lines 30-100.

Similarly, the core of The Yellow Rose of Texas program lies in lines 10-80. These lines poke the data statements from the program into the Vic20.

Both programs were printed on my school's Pet printer. Vic programs on cassette will not normally load onto the Pet, but this problem can be overcome with a machine code routine. The following routine should be useful for anyone who wants to obtain a listing of a Vic program from a Pet printer:

```
1 SYS 1024
2 M0400 0487
3 0400 00 01 10 00 8F 00 00
4 Press RETURN
5 Press X and RETURN
```

If your Pet cannot use machine code, enter the following line:

```
POKE 4999,1:POKE 41,16:CLR
```

Nagaraj Jayakumar

Contribute!

You can share your own favourite Sound or Vision programs with other readers by sending lists with explanations to us at *Popular Computing Weekly*.

WRITE TO: Sound & Vision, Popular Computing Weekly, Holthouse Court, 19 Whitcomb Street, London WC2 7HF.

GREENSLEEVES

```
1 REM *****
2 REM *
3 REM * GREENSLEEVES
4 REM *
5 REM * BY
6 REM *
7 REM * N.M. JAYAKUMAR
8 REM *
9 REM * 9/5/82
10 REM *****
20 POKE36878,10:A=36875:POKE=17072:READC:POKEA,C:
   READC:POKE=170C:HEXTT:POKEA,0:NEXTB:END
30 DATA209,200,217,400,221,200,225,300,228,100,
   225,200,221,400,215,200,203,300,209,100
40 DATA215,200,217,400,209,200,209,300,207,100,
   209,200,215,400,207,200,195,400,209,200
50 DATA217,400,221,200,225,300,228,100,225,200,
   201,400,215,200,203,300,209,100,215,200
60 DATA217,300,215,100,209,200,207,300,201,100,
   207,200,209,600,209,600,229,600,229,300
70 DATA228,100,225,200,221,200,215,200,203,200,
   209,100,215,200,217,400,209,200,209,300
80 DATA207,100,209,200,215,400,207,200,195,600,
   225,600,229,300,228,100,225,200,221,400
90 DATA215,200,203,300,209,100,215,200,217,300,
   215,100,209,200,207,300,201,100,207,200
100 DATA209,600,209,400
```

YELLOW ROSE OF TEXAS

```
1 REM *****
2 REM *
3 REM * BY
4 REM *
5 REM * NAGARAJ
6 REM *
7 REM * JAYAKUMAR
8 REM *
9 REM *****
10 POKE36878,10:A=36875
12 POKE=17072
20 READA
30 POKEA,C
40 READC
50 POKE=170C:HEXTT
60 POKEA,0
70 HEXTT
80 END
100 DHTA195,300,197,100,183,200,195,200,195,200,195,200,201,200,195,400,197,200
120 DHTA195,200,209,200,215,100,219,600,195,200,195,200,219,200,219,200,219,200
130 DHTA195,200,195,200,195,200,201,200,195,400,197,200,195,200,195,200,209,200
140 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
150 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
160 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
170 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
180 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
190 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
200 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
210 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
220 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
230 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
240 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
250 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
260 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
270 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
280 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
290 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
300 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
310 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
320 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
330 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
340 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
350 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
360 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
370 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
380 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
390 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
400 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
410 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
420 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
430 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
440 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
450 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
460 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
470 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
480 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
490 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
500 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
510 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
520 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
530 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
540 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
550 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
560 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
570 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
580 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
590 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
600 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
610 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
620 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
630 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
640 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
650 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
660 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
670 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
680 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
690 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
700 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
710 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
720 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
730 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
740 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
750 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
760 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
770 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
780 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
790 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
800 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
810 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
820 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
830 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
840 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
850 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
860 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
870 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
880 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
890 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
900 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
910 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
920 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
930 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
940 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
950 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
960 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
970 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
980 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
990 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
1000 DHTA195,200,195,200,219,200,219,200,219,200,219,200,219,200,219,200,219,200
```


Peek & poke

Peek your problems to our address. Ian Beardmore will poke back an answer.

WATCH THIS SPACE BEFORE CHOOSING

J. R. Barratt of Sheffield Close, Little Sutton, Cheshire, writes:

Q Could you tell me which computer, if any, is best suited for my needs. Besides the usual features, it should be able to file an index for my record collection which includes 1,000 Singles, 500 LPs and 500 78s. Cross-references should include artists, titles, first lines of songs and musical groupings such as Classical, Rock and Country. And, if that is not enough, I would like a strong Chess player as well.

A The most essential thing that you need is storage space, and in effect that means a disc unit. The one essential piece of information that you leave out is price. The cheapest solution would be a ZX81 and a Monolith disc drive, but that would leave you little change out of £300. A BBC Micro, or a Vic-20, with disc drive would both be up in the £600 range.

You also fail to say how soon you need your computer. This year is going to see a great deal of activity in the micro market, with both Acorn and Commodore promising to bring out cheaper computers to compete with the ZX Spectrum.

More importantly, the new ZX Microdrive is on the horizon. It is already causing a great deal of interest as it looks set to cut the price of disc storage by at least half, if not more. But, it will be some months yet before the Microdrive comes onto the market. It is safe to assume that once it does come out, interfaces will quickly be developed to allow it to be used on other computers, in much the same way as the ZX Printer can now be used with a Vic-20, or a BBC Micro.

My advice is to wait until the autumn, by which time you should find your options greatly enhanced. Concentrate on the main computers — the ZX

Spectrum, the proposed Acorn Electron and the new Vic-10 and Vic-30 — as they are the best supported. Also keep an eye on the developments of the Sinclair Microdrive disc unit. As for the Chess, there are quite a few programs to choose from, and I am sure finding one to suit will not be much of a problem.

FLASHER STRIKES IN BORDER INCIDENT

P. Masters of Thalia Grove, London, SE10 writes:

Q I have a BBC micro-computer model B. Please could you tell me if the BBC Micro has an equivalent command to the BORDER command on the ZX Spectrum and the Vic20?

I would also like to know how to alter the flash rates of the colours. Is it possible to alter the combinations of colour to get flashing red/black, instead of the red/cyan?

A The answer to your first question is no. The BBC Micro uses the 6845 chip, which has an uncommitted logic array when it comes to defining a BORDER. Unlike, for example the Vic chip, the 6845 simply does not have a BORDER function in its architecture.

Changing the flash rates and the colours is done by changing the numbers before or after the comma. These numbers control the colour on the screen and its duration:

*FX 9,25

Change the number before the comma to change the colour and change the number after the comma to change the duration.

GAME, SET AND MATCH—AT ONCE!

Stuart Fry of St Mary's Way, Walsall, West Midlands, writes:

Q I am writing a number of games for my BBC Microcomputer in which it is necessary to do a keyboard scan. So far I have been using the INKEY function. This

works once, when the key is pressed, but there is a delay before it works again as the key is being held down. How can I get a smooth action without this delay?

A Before reading the keyboard input the following two:

*FX 12,1

*FX 11,1

This will cause the key to repeat as soon as it is pressed. Follow it with this line, which clears the buffer, after the appropriate INKEY or GET statement.

*FX 15,1

WHEN A COMPUTER IS NOT A COMPUTER

C. R. James of The Grove, Henley-on-Thames writes:

Q I am the owner of a Phillips G7000 and am greatly frustrated by the limit of the computer's programmability. Please could you give me some software. Vic, Atom and Atari have a wide range of software but the G7000 has none.

Is there anyway to expand the G7000? I am tempted to buy a computer from Digital, as the storage is greater than the G7000 which only has about 1K.

A This caused me some problems when I first read it. A Phillips G7000? It was a new name to me.

The problem was sorted out after telephone conversations with Phillips, Computer and Video Games, and Carl Bayer, all of whom were very helpful. It turns out that the Phillips G7000 is not a computer, it is a computerised video TV games machine.

While you can use a computer to play games on your television, you cannot use a games machine as a computer. Apart from a very simple 'Teach yourself Basic' cartridge, which has nothing like the range or capacity of a real computer, there is no way you can use the G7000 as a home based micro.

If you want to get a micro than I would suggest that you look at something like the Vic,

an Acorn, or a ZX, all of which are well supported. You might find it worthwhile to wait a few months as new releases are due from both Acorn and Vic, which should widen your choice.

If you decide not to sell your Phillips to buy a better machine, then there is a club for Phillips owners. The address is, G7000 Video Game Club, 345a Station Road, Harrow, Middlesex.

There is one more point to make. Did you buy your G7000 because you thought it was a computer, or because you went into a shop, asked for a computer, and was sold a G7000. In the first case I'm afraid that it is just bad luck. In the second case, I suggest that you return the machine and try and get your money back.

APOLOGY

Several people have written and pointed out that the answer I gave to Simon Cray in Issue 5 was wrong. You can EDIT even if your memory is nearly full.

The first method is to LIST the line that has to be EDITed, and then press SHIFTEdit. I already knew about this method, but made the mistake of assuming that Simon had already tried it. However, this method does not always work, especially when the memory is very close to being completely full.

One method that will work, even when the previous one fails, is the following:

- 1 Move the cursor to the line you want to EDIT.
- 2 Enter CLS followed by NEW LINE.
- 3 Press SHIFTEdit simultaneously.

This frees the computer from having to maintain a screen display. The line you want to EDIT will be ready and waiting at the bottom.

Send your questions to Peek & poke, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.

Competitions

Puzzle No 11

Puzzle No 11

A bee hive stands at the end of a straight one-mile-long wall on a country estate. Growing along the foot of the wall are some clover plants. The first plant is one foot from the hive entrance. The distance between the first plant and the second is three feet, between the second and third is five feet, and so on. In other words, the distance between each successive plant increases by two feet each time.

A bee starts from the hive, flies to the first plant, collects the pollen and returns to the hive. It then flies to the second plant, collects the pollen, and returns to the hive. It repeats this procedure to all the flowers until it returns, exhausted, from the plant at the end of the wall furthest from the hive. What is the total distance that the bee has flown during its work?

Solution to Puzzle No 7

For the nine discs there are $9 \times 8 \times 7 \times 6 = 3024$ possible combinations. Each set of four digits can be arranged into any one of 24 different combinations, so the number of different draws possible is $3024 \times 24 = 126$.

We now need to know how many of these combinations cannot be arranged, such that at least one of each of the 24 possible arrangements is a multiple of seven.

By running the program, it can be shown that there are only three possible sets: 1236, 1389 and 2469.

```
10 LET Y=0
20 FOR A=1 TO 6
30 FOR B=(A+1) TO 7
40 FOR C=(B+1) TO 8
50 FOR D=(C+1) TO 9
```

```
60 LET NS=STR$(D*1000+C*100+B*10+A)
70 FOR F=1 TO 4
80 FOR F=1 TO 4
90 IF E=F THEN GOTO 160
100 FOR G=1 TO 4
110 IF G=E OR G=F THEN GOTO 150
120 LET H=10-(E+F+G)
130 LET N=VAL$(E)+1000+VAL$(F)+100+VAL$(G)+10+VAL$(H)
140 IF N/7=INT(N/7) THEN GOTO 150
150 NEXT G
160 NEXT F
170 NEXT E
180 LET Y=Y+1
185 PRINT N
190 NEXT D
200 NEXT C
210 NEXT B
220 NEXT A
230 PRINT AT 10, 0: "NUMBERS OF SUCCESSFUL
    DRAWS": Y
```

Of the 126 different draws possible, only three will produce winning numbers. So, to win a pound for a 10p stake the odds are rather unfavourable — 41 to 1 against!

Winner of Puzzle No 7

The winner is: David Budd, Camelford Close, Hulme, Manchester, who gets £10.


Solution to Crossword No 7

Across: 8 Nodes, 9 Process, 10 Edit, 11 Compiler, 13 Paging, 14 Nitric, 17 Exchange, 19 Call, 21 Execute, 22 Wreck.
Down: 1 Interpreter, 2 Adding, 3 Ash, 4 EPROM, 5 Soup tin, 6 Colt, 7 Ostich-like, 12 Sneak up, 15 Reader, 16 Agree, 18 Crew, 19 Axl.

Winner of Crossword No 7

The winner is: Clem Pacey, Lelant, Cornwall, who receives £10.

Crossword No 11



Across

- 8 One that's over a long (3)
- 9 Device to find time for high, untidy get (8)
- 10 Parts from earth, fire wind and water (8)
- 11 Late in mid-session (4)
- 12 Mask for a television (5)
- 14 Inform about the sound of gun-fire (8)
- 17 Leonard's official device (4)
- 18 Certified class cut up pie with greed (8)
- 20 Measure of metal alone (8)
- 21 RAP, returning with equal value (3)

Down

- 1 Light beams show last embracing queen (8)
- 2 Output device changes pre letters (11)
- 3 Peter gets his slaps to find a soil tester (1, 1, 5)
- 4 Powdery, in Hindi style (3)
- 5 Cops, less a hundred years (3)
- 6 Heart monitor arranging drip cargo — AH (11)
- 7 Is less than fifty island (4)
- 12 Quick minute in the communists provides a memory (7)
- 15 They get about or make speculation (6)
- 16 Pass on and be again (3)
- 17 Last column (4)
- 19 Sootily and grossly terminate (3)

CITIZEN PAIN


BY DAVID IRELAND and JAMES MACDONALD



commodore

COMPUTING

April/May 1982 £1.25



An exciting new Commodore peripheral

Own or use a Pet or a Vic?
Fed up with being ignored by all the
traditional monthly magazines?

Fed up with listings, which are too simple
or simply do not work?

You need *Commodore Computing*, the new
monthly magazine. *Commodore Computing*
is published by Nick Hampshire, author of
The Pet Revealed, *Pet Graphics*, *A Library*
Subroutines and *The Vic Revealed*.

Each issue is packed with advanced

advice on how to make the most of your
computer, whether you use a Pet or a Vic.

Each issue covers a host of applications
— software, hardware, machine code, games,
business use — whatever it is you'll find it in
Commodore Computing.

If you want to learn more about your
computer, take out a subscription to
Commodore Computing.

That's the only way to get it, and get it
straight.

Send £12.50 for 1 year's subscription (10 issues) to:

Commodore Computing,
Magsub, Oakfield House, Perrymount Road, Haywards Heath, Sussex RH16 3DH

ZX81 B.B.C. MICRO ATOM VIC
even more fun on
your VIC from

**BUG-BYTE
SOFTWARE**



VICMEN

Undoubtedly the best game currently available for the VIC-20, based on the popular Puckett arcade game. High resolution, colour graphics are used, and the game may be played using either the keyboard or a joystick. All the features of the real game, including sound effects, high score, bonus man etc. Written entirely in machine code so as to fit in the unexpanded VIC-20. Described by Your Computer (June 1982) as "brilliant".

£7 inclusive

VIC PANIC

Based on the popular and addictive arcade game 'Space Panic', this is yet another full feature machine code game for the unexpanded VIC-20. Climb the ladders and dig holes to trap the monsters. Full use is made of high resolution graphics and sound effects.

£7 inclusive

VIC COSMIADS

A superb fast-moving and very addictive version of the popular Galaxians game, for the unexpanded VIC-20. You are continuously under attack from the swooping aliens. Shoot them all down and a new wave of even more ferocious aliens appear. Great sound effects.

£7 inclusive

**BUG-BYTE
SOFTWARE**

100 The Albany, Old Hall Street, Liverpool L3 9EP

VIC-20
**ANOTHER VIC
IN THE WALL**

£7

A slick machine code version of Vic
Remake for the unexpanded
VIC

VIC ASTEROIDS

The famous arcade game with
fun for all the family, specially
adapted for the unexpanded
VIC

£7

sinclair ZX81



Also for the VIC:

VIC MEN £7.00
VIC GAMMON £7.00

MAZOGS	£10.00	INVADERS	£4.00
STARTREX	£5.00	DICTATOR	£9.00
ZKAS ASSEMBLER	£5.00	DAMSEL & THE BEAST	£5.50
ZKAS DEBUGGER	£6.50	CONSTELLATION	£8.00
ZKX TOOLKIT	£6.00	PROGRAM PACKS 1-8 (each)	£4.00
MULTIPLE	£17.50		

BBC MICRO

SPACE WARP	£11.50
B.B.C. CHESS	£11.50
B.B.C. MULTIPLE	£35.00
B.B.C. BACKGAMMON	£8.00
B.B.C. GOLF	£7.00




ATOM

INVADERS	£8.00	FRUIT MACHINE	£4.00
CHESS	£9.00	PINBALL	£4.50
747 FLIGHT	£8.00	LAWYENTH	£7.00
SIMULATION	£8.00	LUNAR LANDER	£5.50
GALAXIANS	£8.00	GOLF	£5.00
BREAKOUT	£4.00		

ALL PRICES INCLUDE POSTAGE

Please send me _____
I enclose cheque/PO for _____
Or Please debit my Access 5204 _____
Backorder 489 _____ Expiry date _____
Name _____
Address _____
City _____
Country _____
Order Despatch Available
ACCESS BARCLAYCARD ORDERS WELCOME ON 24h
ANSAPHONE 01-222 2643, or mail to
BUG-BYTE SOFTWARE,
FREEPOST (No stamp req.)
LIVERPOOL L3 9AB

Pop. C.W782

ZX81 B.B.C. MICRO ATOM VIC

